



COOLING & HEATING  
*Live Better*

# M-SERIES CONTRACTOR GUIDE





▼

# MITSUBISHI ELECTRIC IS A WORLD LEADER IN PRODUCTS THAT HELP PEOPLE LIVE BETTER.

When it comes to providing personalized comfort in every room of every building, we are here to help. No other company is as committed to creating environmentally friendly and affordable technology that's ideal for today's home and work environments no matter the size or shape. With over 30 years of industry leadership, we are proud to be America's #1 selling brand of ductless technology.

## **QUALITY**

Mitsubishi Electric is consistently recognized by HVAC contractors as the #1 preferred brand with the highest quality rating among manufacturers. Our products provide extraordinary service life extending years beyond the norm.

## **PERFORMANCE**

We deliver a complete range of compact and powerful cooling and heating products that are also intelligent, energy-efficient and quiet.

## **TRAINING**

We provide comprehensive product and applications instruction through our regional training centers across the United States.

## **SUPPORT**

We offer national TV and digital campaigns, co-op and advertising assistance, social media exposure and training, meSync apps for iPhone and iPad, and the most experienced sales, engineering and service professionals.

## **GROWTH**

With nearly 20 years of consistent double-digit percentage growth, we continue to lead the market's growth acceleration. Our products and services provide opportunities for distributors and contractors to enhance and grow their businesses.

## TABLE OF CONTENTS

PRODUCT OVERVIEW .....	4
PRODUCT FEATURES	
H2i® Technology .....	5
ENERGY STAR .....	6
INVERTER Technology .....	8
Healthier and Cleaner Air .....	9
Programmable Comfort .....	10
Temperature Control .....	13
BEST PRACTICES .....	14
MULTI-ZONE PRODUCTS .....	16
SINGLE-ZONE PRODUCTS .....	20
M-SERIES PRODUCT SPECIFICATIONS .....	26
ADDITIONAL INFORMATION .....	39

# PRODUCT OVERVIEW



Outdoor Unit

Floor-mounted

Ceiling-recessed

Horizontal-ducted

Wall-mounted

## Features

## Benefits

### INVERTER-DRIVEN COMPRESSORS

Maximizes energy savings by using only the energy needed to perfectly cool or heat an area.

### EASY INSTALLATION

Installs quickly and easily, without the need for major construction and remodeling.

### COMPLETE ZONE CONTROL

Realizes maximum control and energy efficiency by cooling and heating only those spaces in use.

### PERSONAL COMFORT CONTROL

Complete comfort control of temperature, fan speed, and air direction in each room or zone.

### CLEANER AIR WITH WASHABLE, ANTI-ALLERGEN FILTERS

Improves air quality and saves money.

### H2I® HYPER-HEAT PUMPS

Provides instant warmth even in extreme climates (down to -13° F)

### ULTIMATE ENERGY EFFICIENCY


With higher SEER and HSPF ratings

# HEAT AND LOTS OF IT



Mitsubishi Electric systems feature the most advanced technology for delivering exceptional heat pump performance.

## H2i TECHNOLOGY

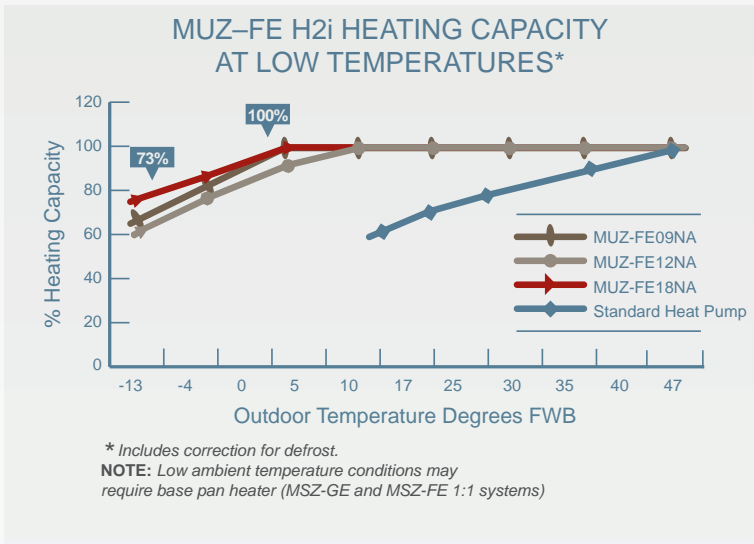

**HEATING** even when it's -13° F outdoor ambient, producing up to 100% heating capacity at 5° F (MSZ-FE09/18) and 92% capacity at 5° F for MSZ-FE12

**YEAR-ROUND COMFORT** in extreme climates without the need for energy-consuming indoor supplemental heating devices

**HOT-START TECHNOLOGY** provides warmth from the start, reducing drafts

**MINIMAL MAINTENANCE** thanks to easily accessible filters, little or no ductwork to clean, and simple wiring between the indoor and outdoor units



## QUIETER THAN A HUMAN WHISPER.

Do you hear that? No? Mitsubishi Electric systems operate at low sound levels. Our indoor units produce decibels barely at a whisper level. Compare to other common sounds:

Ambulance siren	120 decibels
Circular saw	110 decibels
Vacuum cleaner	80 decibels
Normal conversation	60 decibels
Whisper	30 decibels
<b>Our indoor units</b>	<b>19-34 decibels*</b>

Did you hear that? We hope you did.

Source: National Institute for Occupational Safety and Health  
 \*Smallest to largest capacity indoor unit at low speed



## ENERGY EFFICIENT AND ENVIRONMENTALLY FRIENDLY

---

M-Series systems utilize green technologies, and are much more efficient, so homeowners never have to sacrifice comfort over worries about high-energy costs.

- ◆ INVERTER technology results in substantial energy and utility savings for homeowners
- ◆ Zone control for improved comfort and decreased energy usage
- ◆ Many ENERGY STAR® rated systems
- ◆ SEER ratings as high as 26—dramatically better than conventional systems
- ◆ Local and state utility rebates and incentive opportunities
- ◆ Environmentally friendly R410A refrigerant with zero Ozone Depletion Potential (ODP)
- ◆ 83% of system components are recyclable
- ◆ Washable filters made from natural materials

Visit [dsireusa.org](http://dsireusa.org) for information on available local rebate opportunities from state or utility companies.



### Savings Opportunities

Mitsubishi Electric split-zoning, cooling-only and heat pump systems are so energy efficient that a majority of our INVERTER-driven systems are ENERGY STAR® rated. This can mean big savings. Add in the federal tax credit and local government and utility rebates, and you have an opportunity to enjoy comfort at substantial savings.

For details on qualifying systems, go to [www.mitsubishicomfort.com/taxcredit](http://www.mitsubishicomfort.com/taxcredit), or visit [www.dsireusa.org](http://www.dsireusa.org) for information on available local rebate opportunities from state or utility companies.

# ENERGY STAR SYSTEMS




RESIDENTIAL AIR CONDITIONER							
AHRI Reference #	Outdoor	Indoor	EER 95° F	SEER	HSPF	Tax Credit	Most Efficient
3575942	MUY-GE09NA	MSY-GE09NA	13.60	21.00	N/A	Yes	Yes
3575943	MUY-GE12NA	MSY-GE12NA	12.50	20.50	N/A		Yes
4934966	MUY-GE15NA-1	MSY-GE15NA	13.00	21.00	N/A	Yes	Yes
4217791	MUY-GE24NA	MSY-GE24NA	12.50	19.00	N/A		
RESIDENTIAL HEAT PUMP							
AHRI Reference #	Outdoor	Indoor	EER 95° F	SEER	HSPF	Tax Credit	Most Efficient
4908219	MUZ-FE09NA-1	MSZ-FE09NA	15.50	26.00	10.00	Yes	Yes
4934170	MUZ-FE12NA1	MSZ-FE12NA	12.90	23.00	10.50	Yes	Yes
4217888	MUZ-FE18NA	MSZ-FE18NA	14.20	20.20	10.30	Yes	Yes
3577499	MUZ-GE09NA	MSZ-GE09NA	13.60	21.00	10.00	Yes	Yes
3576362	MUZ-GE12NA	MSZ-GE12NA	12.50	20.25	10.00	Yes	Yes
4934349	MUZ-GE15NA-1	MSZ-GE15NA	13.00	21.00	10.00	Yes	Yes
4217872	MUZ-GE24NA	MSZ-GE24NA	12.50	19.00	10.00	Yes	
3589025	MXZ-2B20NA	MSZ-GE09NA + MSZ-GE09NA	12.50	18.00	8.90	Yes	
3577580	MXZ-2B20NA	Non-Ducted	12.00	18.00	8.90		
3949963	MXZ-3B24NA	MSZ-GE06NA + MSZ-GE06NA + MSZ-GE09NA	12.50	17.50	9.30	Yes	
3896180	MXZ-3B24NA	MSZ-GE06NA + MSZ-GE06NA + MSZ-GE12NA	12.50	17.50	9.30	Yes	
3885922	MXZ-3B24NA	Non-Ducted	12.00	17.50	9.30		
4385514	PUZ-HA30NHA4	PCA-A30KA	12.10	16.10	9.30		
4392937	PUZ-HA30NHA4	PEAD-A30AA	12.00	16.50	9.50		
4385513	PUZ-HA30NHA4	PKA-A30KA	12.00	16.50	9.50		
4385515	PUZ-HA30NHA4	PLA-A30BA	12.20	15.60	9.40		
4385518	PUZ-HA36NHA4	PCA-A36KA	12.10	16.60	10.30		
4393024	PUZ-HA36NHA4	PEA-A18AA(2)	12.50	16.80	10.40	Yes	
4392938	PUZ-HA36NHA4	PEAD-A36AA	12.10	16.80	10.40		
4385517	PUZ-HA36NHA4	PKA-A36KA	12.00	16.20	10.00		
4385516	PUZ-HA36NHA4	PLA-A36BA	12.60	17.00	10.00	Yes	
3837466	SUZ-KA09NA	SEZ-KD09NA	12.00	15.00	10.00		
4415024	SUZ-KA09NA	SLZ-KA09NA	12.00	15.00	9.60		
3837467	SUZ-KA12NA	SEZ-KD12NA	12.50	16.00	10.00	Yes	
4415252	SUZ-KA12NA	SLZ-KA12NA	12.00	15.40	9.60		
3837469	SUZ-KA15NA	SEZ-KD15NA	12.00	15.50	10.00		
3837470	SUZ-KA18NA	SEZ-KD18NA	12.50	17.50	10.00	Yes	



## PUT COMFORT ON CRUISE CONTROL

### INVERTER TECHNOLOGY

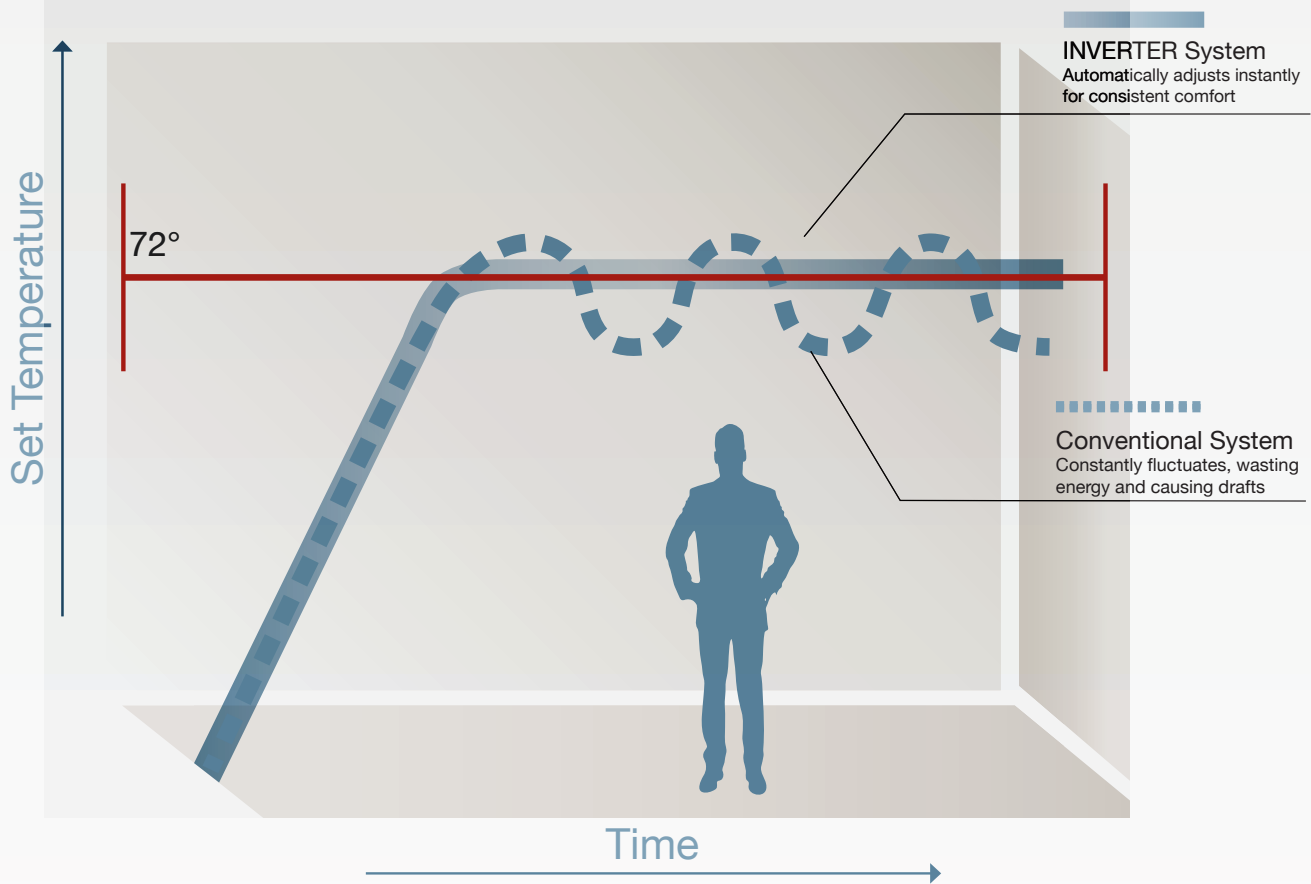

## INVERTER

Sophisticated, electronic control systems detect any change in room or zone temperature and—like a car’s cruise control—automatically adjust the speed of the outdoor unit’s INVERTER-driven compressor for precise capacity and temperature control. Electronic LEVs exactly control refrigerant flow to regulate coil temperature.





## MULTIPLE FILTERS FOR CLEANER, HEALTHIER AIR

---

Our indoor units use a sophisticated multi-part filtration system to reduce contaminants such as allergens, viruses and bacteria from the air. This combination of filters provides a healthier, breathing environment for the home.

### 1 HYBRID CATECHIN PRE-FILTER:

- Captures dust particles and absorbs odor-causing gases
- Hybrid-coating process makes the catechin filter washable and, if properly maintained with regular cleaning, remains effective for up to ten years

### 2 PLATINUM CATALYST DEODORIZING FILTER:

AVAILABLE ON MSZ-FE9/12NA

- Features a ceramic surface absorption element and uses nanotechnology for high-power odor absorption
- Periodic cleaning, following the recommended procedures, will maintain filter effectiveness for up to two years

### 3 BLUE-ENZYME ANTI-ALLERGEN FILTER:

AVAILABLE ON MSZ-FE9/12NA


- Reduces germs, bacteria, and viruses
- Helps trap dust, pollens, mites, and other particles
- Utilizes an enzyme catalyst to help break down the sulfur atom bonds in allergen proteins, transforming them into non-allergen proteins, and, effectively cleaning the air (filter should be cleaned regularly to maintain effectiveness)





## MHK1 WIRELESS REMOTE CONTROLLER KIT

Includes Wireless Wall-mounted Remote Controller, Wireless Receiver and Cable. Portable Central Controller and Outside Air Sensor are optional accessories.

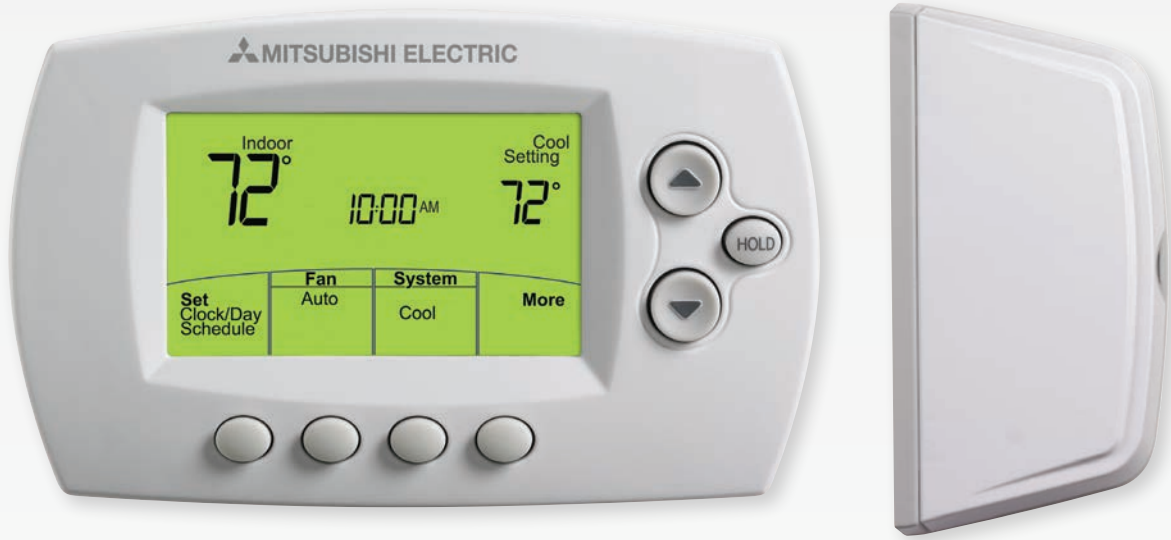

### Wireless Wall-Mounted Remote Controller and Wireless Receiver

- Installs anywhere with simple wall-mounted design
- Large, backlit, easy-to-read display
- Dual set-point control with system changeover
- Both controller and receiver enabled with RedLINK™ reliability

The basic MHK1 Wireless Remote Controller Kit includes a Wireless Wall-mounted Remote Controller and a Wireless Receiver located with the indoor wall- or ceiling-mounted unit. You may choose to enhance your control convenience and flexibility with an optional Portable Central Controller, Outside Air Sensor and the new RedLINK™ Internet Gateway.

### Optional MCCH1 Portable Central Controller

- Control up to 16 RedLINK™ devices
- Requires MHK1 per indoor unit
- Monitor and control On/Off, Mode and Set Temperature
- Schedule override capability
- Does not interfere with other wireless devices
- Displays outside air temperature and humidity when used with MOS1 Outside Air Sensor



### Optional MOS1 Outside Air Sensor

- Monitors outside air temperature and humidity
- Displays on MHK1 Remote Controller and MCCH1 Portable Central Controller



## Optional RedLINK Internet Gateway (Available through select distributors)

- Connects any RedLINK Comfort System to the Internet to provide remote access from PC, smartphone or tablet
- No monthly fee, free app download
- Remotely monitor and control your cooling and heating system, including whole-house humidifier and dehumidifier – at any time, from any place
- View/change system settings and access multiple systems/zones
- Provides over 90 temperature/comfort alerts through a dedicated website
- Upgrades automatically as new features become available



Just connect the Gateway device (far right) to your internet router, download the free app, register a serial number with the Gateway web site and pair the system with the RedLINK™ enabled devices of your choice. You'll be ready to control in about 15 minutes.

## MHK1 FEATURES

FUNCTION	DESCRIPTION
ON/OFF	On/Off operation for a single indoor unit
Operation Mode	Cool / Drying / Auto / Heat / Fan operation modes dependent on connected system
Temperature Setting	Set temperature from 40° F - 99° F depending on operation mode and connected system
System Changeover Deadband Value	2° F - 8° F
Schedule Operation	5-2, 5-1-1
Optimal Start	Eliminates the guesswork when setting your schedule. Allows the remote controller to "learn" how long your split-zoning system takes to reach programmed temperature setting, so the temperature is reached at the time you set
Fan Speed Setting	Hi/Mid-2/Mid-1/Low/Auto Available fan speed settings dependent on connected system
Airflow Direction Setting	Airflow angles: 100° - 80° - 60° - 40° and oscillate available airflow direction settings dependent on connected system
Permit/Prohibit Function	Individual prohibit operations for each remote controller function (ON/OFF, Set Temperature and Operation Mode)
Space Temperature	Displays the measured space temperature
Error Indication	Displays error code
Display Outside Temperature and Humidity	Requires optional MOS1 Outside Air Sensor
Dimensions - (W x D x H)	Remote Controller: 5-3/16" x 1-1/2" x 3-9/16" Receiver: 3-1/4" x 1-5/16" x 6-7/16"
Operating Ambient Temperature	Remote Controller: 32° F - 120° F Receiver: -40° F— 165° F
Operating Ambient Humidity	Remote Controller: 5% - 90% RH (non-condensing) Receiver: 5% - 90% RH (non-condensing)
Power Supply	2 AA batteries (included)

Note: MHK1 Compatible with current INVERTER-driven M-Series as noted in data charts.



## HAND-HELD COMFORT CONTROL

Mitsubishi Electric hand-held controllers can adjust temperature, fan speed, and more.



### CONTROLLER FEATURES INCLUDE:

- ◆ **MODE:** HEAT, COOL, AUTO, and DRY
- ◆ **FAN:** Adjusts fan speed
- ◆ **STOP/START:** A 12-hour ON/OFF timer
- ◆ **ECONO COOL:** Energy efficient cooling option
- ◆ **VANE:** Sets horizontal vane position
- ◆ **TIME:** Power off timer and clock adjustment
- ◆ **SMART SET:** Programs multiple settings into one quick-press feature. Programs heating set back

*Additional features available on some models*

Standard for M-Series wall-mounted and floor-mounted systems.

Optional wall-mounted wired controller is available (PAR-21MA, requires MAC-333 adapter).

## DETECT AND CONTROL TEMPERATURE FLUCTUATIONS

All M-Series systems detect room temperature fluctuations and automatically adjust performance for ultimate comfort in any room.

- ◆ All indoor models feature a return air sensor that constantly monitors and maintains room temperature
- ◆ Continuous fan operation ensures temperature consistency
- ◆ Systems with an i-see Sensor™ scan the room and adjust airflow based on ambient temperature readings (MSZ-FE09/12NA i-see Sensor models only)
- ◆ Auto changeover feature automatically switches between cooling and heating modes as needed to maintain a consistent temperature—just set it and forget it (MUZ and SUZ outdoor units)
- ◆ Seven horizontal airflow directions provide 150° of lateral airflow for greater conditioned air circulation (wide vane or swing mode, available on the MSY(Z)-FE09/12/18/GE24/D30/36NA)

**i-see Sensor™**



**i-see Sensor**  
Detects temperature variations and controls the airflow for ultimate comfort

This amazing technology constantly monitors and adjusts temperatures for maximum comfort and efficiency.

- Measures infrared radiation generated from surrounding walls and surface angles
- Efficiently adjusts temperatures to ideal comfort levels for occupants

# INSTALLATION BEST PRACTICES

## Look for opportunities to use Mitsubishi Electric systems on every job!

Single and Multi-zone systems for Hot and Cold Spots, Living Rooms, Bedrooms, Kitchens, Allergy Problems, Renovations, Energy Savings Opportunities, Media Rooms, Basements, Combination with Traditional System, Whole Floor, Whole Home, New Homes...and more!

Properly installed systems heat and cool homes for a fraction of the cost of traditional systems. By following installation best practices and providing homeowner education, you will help to insure customer satisfaction, and increase referrals and sales. Visit a Mitsubishi Electric 2-day training course for more information. Ask your Mitsubishi Electric distributor for details.

### Outdoor Unit (Compressor)

- Set the unit on a stable, level surface.
- Use adjustment risers to prevent debris and snow build-up and allow better drainage.
- Secure outdoor units to the pad, risers and/or surface using bolts and/or adhesives.

### Line Set Insulation and Protection

- Insulation must cover entire line set length to avoid condensation and decreased efficiency.
- Once insulated, protect the outdoor portion of the line set with Line Hide to avoid premature insulation damage.
- Add UV tape as needed on areas without Line Hide to ensure entire length is protected

### Refrigerant Charge

- Adjust refrigerant charge ONLY IF NECESSARY; most installations do not require adjustments.
- Gauges are not needed to verify refrigerant levels. Only if adjustments are necessary, be sure to use a scale when adding/removing refrigerant.

### Condensate Drain

- Must slope downhill and can be routed with line set and run to a suitable termination point, away from crawl spaces and walkways.

### Cold Climate Recommendations


- Use a pan heater to avoid defrost discharge freezing inside the compressor.
- Increase clearance under the outdoor unit to promote easy drainage and reduce snow and ice buildup.
- Consider wall-mount brackets to maximize outdoor unit clearance.

### Tools

- Ratchet Flaring Tool
- Programmable Refrigerant Charging Scale
- Torque Wrench
- R 410A Gauge and Hose Set

## Installation Tips for Maximum Efficiency—Indoors

- For homes with electric furnaces, consider shutting off the furnace at the breaker or set back the furnace thermostat so that it does not compete with the Mitsubishi Electric system.
- For homes with zonal electric heat, consider shutting off the heaters at the breaker or set back the zonal heater thermostats so they do not compete with the Mitsubishi Electric system.
- For temperature set back, set programmable thermostat to HEAT with the fan in ON position for air distribution and setting the temperature 4° F below the Mitsubishi Electric system.

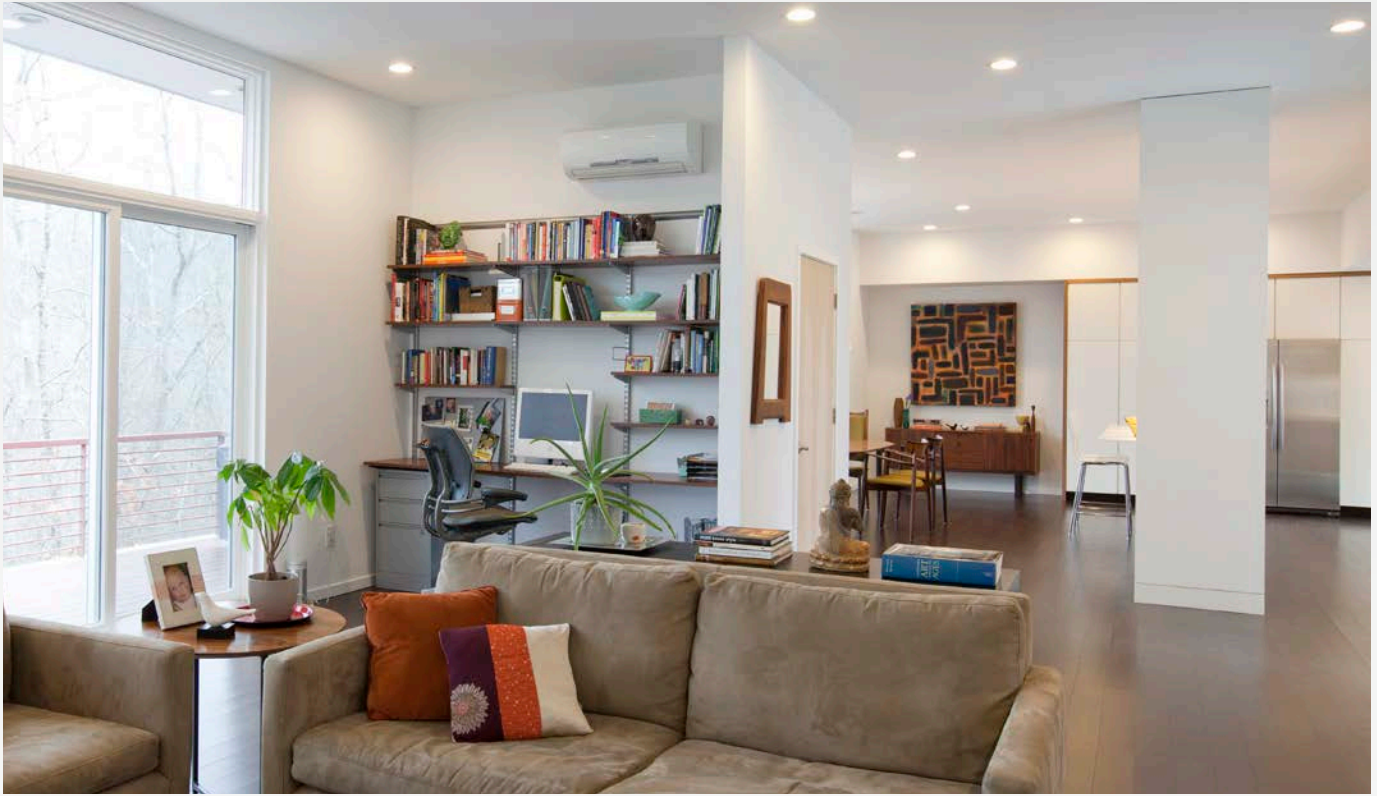

### Homeowner Education

Educate homeowners about their Mitsubishi Electric system to reduce callbacks and generate referrals:

- Use the Mitsubishi Electric system as the primary heating and cooling system to maximize benefits, maintain comfort and ensure that the unit performs most efficiently.
- Secondary heating and cooling systems should remain off until your comfort is compromised. If your comfort is compromised, supplement with your secondary system until your comfort requirements are met.
- In extremely cold weather, you can temporarily:
  - » Increase the temperature setting of the Mitsubishi Electric system
  - » Increase the fan speed
  - » Close doors to unoccupied portions of the house; and/or
  - » Increase the thermostat setting on secondary heating systems as needed
- Cleaning the filters several times a year optimizes the performance of the Mitsubishi Electric system. Monthly cleaning is ideal for systems that are used regularly.

---

For technical information including submittals, parts, installation, service and more please visit [www.mylinkdrive.com](http://www.mylinkdrive.com)



# MULTI-ZONE PRODUCTS



## M-SERIES MULTI-ZONE PRODUCTS AND FEATURES

Total zone control: individually controlled rooms (up to 8) with a single outdoor system

With the MXZ-B multi-zone system your customers can enjoy ideal levels of comfort in the rooms you use most while reducing their energy costs. Each zone operates independently. People in different rooms—like the kitchen, master bedroom or living room—can set temperatures for personalized comfort.



**MXZ-8B48**



**MXZ-2B20**

**MXZ-3B24**

**MXZ-3B30**

**MXZ-4B36**

### THE MULTI-ZONE SYSTEM FEATURES INCLUDE:

- Mix and match flexibility of indoor unit styles and combinations
- A wide range of indoor unit capacities that match the room size and requirements
- Flexible options to tackle the most challenging multi-room installations
- High efficiency, multiple ENERGY STAR® combinations
- Simple, quick, and cost-effective installation
- Four-ton outdoor unit can support up to eight indoor units using branch boxes
- Advanced microprocessor control
- Auto restart following a power outage
- Self-check function offering integrated diagnostics
- Wired and wireless control options

### WALL-MOUNTED INDOOR UNITS FOR MULTI-ZONE SYSTEMS

#### *Cooling and Heating*



Slim, wall-mounted indoor units provide zone comfort control. INVERTER-driven compressors and electronic LEVs provide higher efficiency with controlled power usage. The A-control feature powers the indoor unit from the outdoor unit, and should a power outage occur, the system is automatically restored when power returns.

### MSZ-GE Heat Pumps | 06, 09, 12, 15, 18, 24

- INVERTER-driven compressor
- Provides cooling and heating in a wide range of capacities
- Offers a wide vane for a wider angle of airflow, 150° from left to right (on FE12/GE24/D30/D36 models)





### MSZ-FE High Efficiency Heat Pumps | 09, 12, 18

- Quiet operation as low as 22 dB(A)
- Offers a wide vane for a wider angle of airflow, 150° from left to right
- Motorized horizontal vanes on FE09/12/18 models
- i-see Sensor technology on FE09/12 models
- Triple filtration system on FE09/12 models




### CEILING-RECESSED INDOOR UNITS FOR MULTI-ZONE SYSTEMS

*Cooling and Heating*

SLZ-KA 2'x2' ceiling-recessed cassette units offer a wide airflow pattern for better air distribution in a less obtrusive style. Install SLZ in a hard ceiling (with an access panel for servicing) or in 2'x2' drop ceiling.

### SLZ Heat Pumps | 09, 12, 15

- INVERTER-driven compressor
- Ventilation air knockouts
- Built-in condensate lift mechanism (up to 20")
- Offers a 2, 3, or 4 way airflow pattern



### HORIZONTAL-DUCTED HEAT PUMPS FOR MULTI-ZONE SYSTEMS

*Cooling and Heating*

SEZ ducted units provide comfort and efficiency while staying hidden either in the ceiling or beneath the floor.

### SEZ Heat Pumps | 09, 12, 15, 18

- INVERTER-driven compressor
- Built-in condensate lift mechanism (up to 22")
- Static capability up to 0.20" WG
- Optional filter box with MERV-8 filters



### FLOOR-MOUNTED INDOOR UNITS FOR MULTI-ZONE SYSTEMS

*Cooling and Heating*

Floor-mounted indoor unit mounts on the floor or up to 5" above floor and has front panel access to the filter for ease of cleaning. It is perfect for difficult areas that may be smaller or don't have usable space on the walls.

### MFZ Heat Pumps | 09, 12, 18

- Top and bottom discharge vanes
- Hot-start technology
- Quiet operation
- Wireless remote control with smart set feature

*Note: Select PLA, PCA, PEAD models are also compatible with select multi-zone MXZ-B systems. For full MXZ-B combinations list, please see page 17*

# MULTI-ZONE SYSTEM POSSIBILITIES

For a complete list of the MXZ-B Series approved combinations, visit [www.mitsubishi.com/multizone](http://www.mitsubishi.com/multizone)

## MXZ-2B20NA-1 (2:1) Outdoor Unit




Two MSZ-GE09NA Indoor Units  
(Two indoor units must be installed.)

## MXZ-3B24/30NA-1 (2:1, 3:1) Outdoor Unit




SEZ-KD12NA Indoor Unit  
MSZ-GE09NA and MFZ-KD09NA Indoor Units  
(Two indoor units must be installed.)

## MXZ-4B36NA-1 (2:1, 4:1) Outdoor Unit

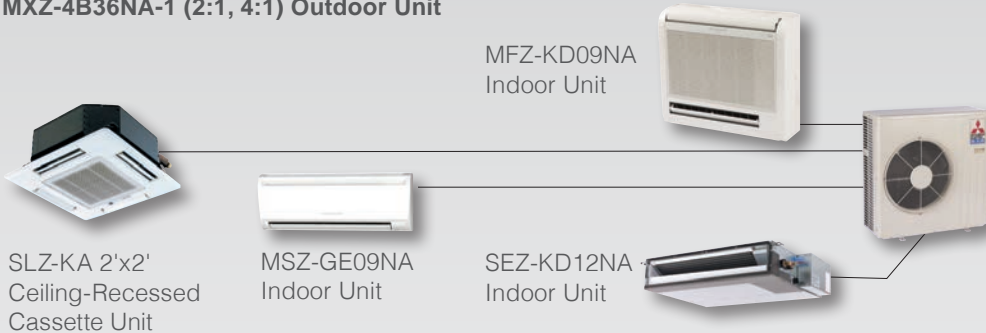

(Two indoor units must be installed.)

## MXZ-8B48NA-1 (2:1, 8:1) Outdoor Unit\*

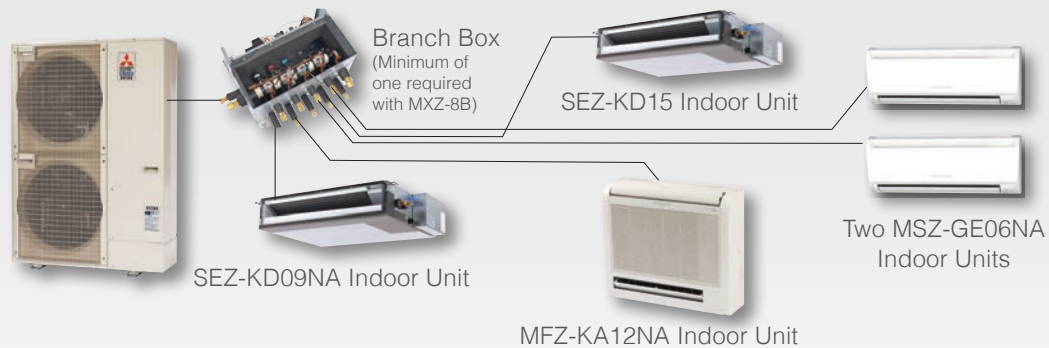

(Two indoor units must be installed.) \*Illustration purposes only.  
For full MXZ-B combinations list, please see page 16

# MULTI-ZONE SYSTEM POSSIBILITIES

For a complete list of the MXZ-B Series approved combinations, visit [www.mitsubishi-pro.com/multizone](http://www.mitsubishi-pro.com/multizone)



MXZ Indoor Unit Compatibility Table—List of which units are compatible with which MXZ Multi-Zone Outdoor Units

Multi-Zone Outdoor Units	Indoor Units								
	MSZ-A/GA	MSZ-FD/FE	MSZ-GE	MFZ	SEZ	SLZ	PCA	PLA	PEAD
<b>MXZ-2B20-1</b>	✓	✓ 18 (NO)	✓ 18, 24 (NO)	18 (NO)	9, 12, 15 ✓ 18 (NO)	✓	(NO)	(NO)	(NO)
<b>MXZ-3B24</b>	✓	✓	✓ 24 (NO)	✓	✓	✓	(NO)	18 ✓ 12, 24 (NO)	(NO)
<b>MXZ-3B30</b>	✓	✓	✓	✓	✓	✓	24 ✓	18, 24 ✓ 12 (NO)	24 ✓
<b>MXZ-4B36</b>	✓	✓	✓	✓	✓	✓	24 ✓	18, 24 ✓ 12 (NO)	24 ✓
<b>MXZ-8B48</b>	✓	✓	✓	✓	✓	✓	✓	12, 18, 24 ✓	24 ✓

*This information is current as of April 25, 2013. There are NO indoor units larger than 24,000 BTU/h that can be connected to MXZ Systems.*

# SINGLE-ZONE PRODUCTS



## M-SERIES SINGLE-ZONE PRODUCTS AND FEATURES

Total control for total comfort: single rooms can now have ultimate comfort with the power of precise control over hot and cold spots.



### **SINGLE-ZONE, WALL-MOUNTED HEAT PUMPS** *Cooling and Heating*

Slim, wall-mounted indoor units provide zone comfort control. INVERTER-driven compressors and electronic LEVs provide higher efficiency with controlled power usage. The indoor unit is powered by the outdoor unit, and should a power outage occur, the system is automatically restored when power returns.

#### **MSZ/MUZ-GE/D Heat Pumps | 2,800–33,200 Btu/h Capacity Range**

- 14.5–21 SEER, 8.2–10 HSPF, INVERTER-driven compressor
- Provides cooling and heating in a wide range of capacities
- Offers a wide vane for a wider angle of airflow, 150° from left to right (on FE12/GE24/D30/D36 models)
- Ideal for applications in bedrooms, home offices, living rooms, dining rooms  
basements, kitchens, guard houses and more



#### **MSZ/MUZ-FE High Efficiency Heat Pumps | 3,100–25,200 Btu/h Capacity**

##### **Range**

- 20.2–26 SEER, 10–10.5 HSPF, INVERTER-driven compressor
- Quiet Operation as low as 22 dB(A)
- Provides cooling and heating in a wide range of capacities
- Offers a wide vane for a wider angle of airflow, 150° from left to right
- Motorized vertical vanes on FE09/12/18 models
- i-see Sensor technology on FE09/12 models
- Triple filtration system on FE09/12 models
- H2i high heat capabilities at low ambient temperatures  
MSZ-FE09/18 are 100% capacity at 5° FMSZ-FE12 is 92% capacity at 5° F




### SINGLE-ZONE, CEILING-RECESSED, CASSETTE HEAT PUMPS *Cooling and*

#### *Heating*

SLZ-KA 2'x2' ceiling-recessed cassette units offer a wide airflow pattern for better air distribution in a less obtrusive style. Install SLZ in a hard ceiling (with an access panel for servicing) or in 2'x2' drop ceiling.

#### SLZ/SUZ Heat Pumps | 3,100–17,700 Btu/h Capacity Range

- 15–16 SEER, 9.6 HSPF, INVERTER-driven compressor
- Provides cooling and heating in a wide range of capacities
- SLZ/SUZ-KA09/1215 1:1 systems are ENERGY STAR® rated
- Ventilation air knockouts
- Built-in condensate lift mechanism (up to 20")
- Offers a 2, 3, or 4 way airflow pattern



### SINGLE-ZONE, HORIZONTAL-DUCTED HEAT PUMPS *Cooling and Heating*

SEZ ducted units provide comfort and efficiency while staying hidden either in the ceiling or beneath the floor. All 1:1 systems are ENERGY STAR® certified.

#### SEZ/SUZ Heat Pumps | 3,800–19,000 Btu/h Capacity Range

- 15–17.5 SEER, 10 HSPF, INVERTER-driven compressor
- Provides cooling and heating in a wide range of capacities
- Built-in condensate lift mechanism (up to 22")
- Static capability up to 0.20" WG
- Optional filter box with MERV-8 filters

## Cooling Only



### SINGLE-ZONE, WALL-MOUNTED AIR CONDITIONERS *Cooling-only*

Cooling-only models operate quietly and efficiently to provide comfort in any room.

#### MS/MU Air Conditioners | 9,500–12,000 Btu/h Capacity Range

- 13 SEER, non-INVERTER rotary compressor
- 9,500–12,000 Btu/h Capacity Range
- 115 volt, single phase
- Hand-held wireless remote controller only



#### MSY/MUY Air Conditioners | 3,800–34,600 Btu/h Capacity Range

- 15.1–21 SEER, INVERTER compressor
- Offers a wide vane for a wider angle of airflow, 150° from left to right
- Motorized vertical vanes on GE24/D30/D36 models
- Multiple ENERGY STAR® models available

**M-Series systems are not recommended for critical room and low ambient cooling applications. Use commercial grade P-Series with full cooling capacity down to 0° F with wind baffle.**

# M-SERIES ACCESSORIES

## CN 24 RELAY KIT



The CN-24RELAY-KIT-CM3 connects to the CN24 connector on the P-Series, SEZ and SLZ indoor unit control board to enable external supplemental heating equipment. The CN-24RELAY-KIT-CM3 also connects to the MAC-333IF-E System Control Interface to provide the same function for M-Series indoor units.

- Coil Voltage: 12V DC
- Power Consumption: 0.9 W or less
- Maximum Distance from indoor unit to relay: 32' (10m)
- Wire Size: 18 to 22 AWG

## MAC-333



- Allows M-Series indoor units to communicate with the CITY MULTI Controls Network via M-Net.
- Provides an input to allow remote On/Off control of indoor unit (3-Wire plug adapter included)
- Auxiliary heat and humidification control
- Allows the M-Series indoor units to connect to MHK1 Wall-Mounted Wireless Remote Controller when using other MAC-333IF functions  
*Note: External 12VDC power supply is required when adding the MHK1 to the MAC-333IF*
- Allows the M-Series indoor units to connect to a MA remote controller
- Power: 12V DC (supplied from indoor unit)
- Provides two outputs to allow for the following control scenarios:
  - Equipment Status and Error
  - Equipment Status and Auxiliary Heat Source
  - Equipment Status and Humidifier Control
  - Auxiliary Heat Source and Humidifier Control*Note: External 12VDC power supply is required for these functions*
- Indoor unit connecting cable: Dedicated 5-wire cable included



## BASEPAN HEATERS

---

Base Pan Heaters limit ice build-up by preventing freezing before water drains from the base pan. The heater installs in the bottom of the Base Pan and connects to the Indoor Control Board on FE and GE models.

- For installations where outdoor ambient temperatures are expected to be below freezing for periods longer than 72 hours straight
- Heater is energized when unit is in defrost
- E12913527 for A models requires change of power board—included—to operate heater



## DPLS1 DIAMONDBACK® DRAIN PAN LEVEL SENSOR/CONTROL

---



A condensate sensor designed to fit the Mitsubishi Electric M-Series, P-Series and CITY MULTI® indoor unit drain pans. DPLS1 shuts down the indoor unit when high condensate levels are detected in the drain pan.

- Meets the intent of International Mechanical Code “allowed exception to the secondary drain pan requirement”
- All solid state—no floats or other moving parts—battery powered
- Compact size with no additional energy consumption—timed intermittent sensing with built-in battery check
- Includes harnesses for M-Series, P-Series and CITY MULTI indoor units
- Does not disrupt communications between the outdoor unit, compressor, and indoor unit

# M-SERIES ACCESSORIES

## BALL VALVES





### DIAMONDBACK BV-SERIES BALL VALVES

Diamondback BV-Series ball valves include the following features:

- Engineered for mini-split and multi-split units
- Full port design with flare connections
- 700 PSIG rated
- Flare connections

#### Other important information:


- Size available: 1/4", 3/8", 1/2", 5/8"
- Fully factory assembled
- Furnace brazed and pressure tested
- Each ball valve is equipped with Schrader® Valve for refrigerant service
- Temperature range: -40° F
- Forged brass body and seal cap
- Polytetrafluoroethylene (PTFE) seals and gaskets (no synthetic O-rings)
- Seal cap design permits valve operation without removal of seal cap
- One-year limited materials and workmanship warranty on ball valves

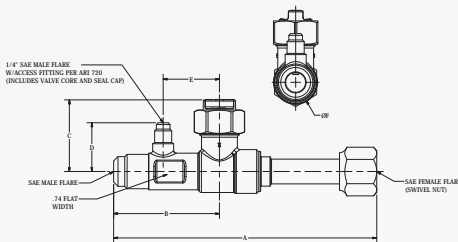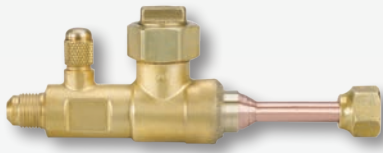

Part Number	SAE Flare	A	B	C	D	E	F
BV14FFSI	1/4"	6.26	2.67	1.81	1.23	1.42	1.10
BV38FFSI	3/8"	6.30	2.67	1.81	1.23	1.42	1.10
BV12FFSI	1/2"	6.51	2.67	1.81	1.23	1.42	1.10
BV58FFSI	5/8"	6.64	2.67	1.81	1.23	1.42	1.10

\* Ball valves come with an insulation piece.

## PLATFORM STANDS



Model DSD-400N

L: 15 3/4"

W: 3 1/4"

H: 3 1/4"

### DIAMONDBACK PLATFORM STANDS

Lift the outdoor unit to new heights.

- Easy to install
- Available for all sizes of mini-split or multi-split systems
- Color matched to the outdoor units
- One-year warranty




## LINESETS



### DIAMONDBACK LINESETS

Diamondback linesets include the following features:

- Quick, efficient, and economical field installation using factory applied Twin Lube insulation and flare connections with flare nuts mounted
- Correct lengths for reducing waste and time
- Quality, consistency, and economy
- All Diamondback lineset tubing is tested in accordance with ASTM E243
- One year warranty



### “TWIN-TUBE” LINESET INSULATION DESIGN

- Balanced outside diameter for uniform coil/uncoil position stability.
- Minimum 1/2” insulation thickness on both tubes



Caps On

Lineset Part Number	Tube Size (IN.)	Length (FT.)	Insul.	Lineset Part Number	Tube Size (IN.)	Length (FT.)	Insul.
MLS143812T-15	1/4 x 3/8	15	1/2"	MLS145812T-30	1/4 x 5/8	30	1/2"
MLS143812T-30	1/4 x 3/8	30	1/2"	MLS145812T-50	1/4 x 5/8	50	1/2"
MLS143812T-50	1/4 x 3/8	50	1/2"	MLS145812T-65	1/4 x 5/8	65	1/2"
MLS143812T-65	1/4 x 3/8	65	1/2"	MLS145812T-100	1/4 x 5/8	100	1/2"
MLS141212T-15	1/4 x 1/2	15	1/2"	MPLS385812T-10	3/8 x 5/8	10	1/2"
MLS141212T-30	1/4 x 1/2	30	1/2"	MPLS385812T-15	3/8 x 5/8	15	1/2"
MLS141212T-50	1/4 x 1/2	50	1/2"	MPLS385812T-30	3/8 x 5/8	30	1/2"
MLS141212T-65	1/4 x 1/2	65	1/2"	MPLS385812T-50	3/8 x 5/8	50	1/2"
MLS141212T-100	1/4 x 1/2	100	1/2"	MPLS385812T-65	3/8 x 5/8	65	1/2"
MLS145812T-15	1/4 x 5/8	15	1/2"	MPLS385812T-100	3/8 x 5/8	100	1/2"

## FILTER BOXES



### FILTER BOXES

FB Series filter boxes are available in compatible sizes for all M-Series horizontal ducted indoor units. FBL1 filter boxes include 1" thick pleated MERV 8 filter(s) installed. Filters are tested in accordance with ANSI/ASHRAE Standard 52.2 and Rated Class 2 under U.L. Standard 900.

The cabinet is constructed of non-insulated 20 gauge, G-60 galvanized steel with a foam gasket and provides an air-tight connection to the indoor unit and access door. Gasket material complies with UL 723 requirements. In addition, a screw-through cabinet design for secure attachment to indoor unit and return connection in rear is easily field-converted to bottom return.

Part Number	Part Description
FBL1-1	FB Series Filter Box for SEZ-KD09NA4
FBL1-2	FB Series Filter Box for SEZ-KD12/15NA4
FBL1-2	FB Series Filter Box for SEZ-KD18NA4
FBL1-2	FB Series Filter for PEAD-A24AA4/30AA4

# M-SERIES ACCESSORIES

ACCESSORY PART NUMBERS	USED WITH THESE MODELS	DESCRIPTIONS
BRP-1	SEZ-KD09 indoor unit	Bottom Return Plate (Converts low profile ducted indoor unit from rear return to bottom return)
BRP-2	SEZ-KD12/15 indoor units	Bottom Return Plate (Converts low profile ducted indoor unit from rear return to bottom return)
BRP-3	SEZ-KD18 indoor unit	Bottom Return Plate (Converts low profile ducted indoor unit from rear return to bottom return)
BV12FFSI2	All MXZ outdoor models and branch boxes	Refrigeration Ball Valve-Flare/Schrader/Insulated - 1/2" size
BV14FFSI2	All MXZ outdoor models and branch boxes	Refrigeration Ball Valve-Flare/Schrader/Insulated - 1/4" size
BV38FFSI2	All MXZ outdoor models and branch boxes	Refrigeration Ball Valve-Flare/Schrader/Insulated - 3/8" size
BV58FFSI2	All MXZ outdoor models and branch boxes	Refrigeration Ball Valve-Flare/Schrader/Insulated - 5/8" size
C13-103	All Blue Diamond Pumps	Blue Diamond Sensor Extension Cable - 15 Ft.
CN24RELAY-KIT-CM3	All SEZ, SLZ, indoor units	Relay Kit for external heater adapter connects to CN24 on indoor control board
CWMB1	All M-Series outdoor units	4 piece (1 pair) condensing unit wall mounting brackets - painted steel
DPLS1	All M-Series indoor units	Drain Pan Level Sensor/Control for indoor unit shut off to prevent Drain Pan Overflow
DSD-400P	All M-Series outdoor units	Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic
E12A49527	MUZ-A09/12/15/17	Outdoor Unit Drain Pan Heater used during defrost cycle
FBL 1-1	SEZ-KD09 indoor unit	FB SERIES Filter Box with MERV 8 Filters
FBL 1-2	SEZ-KD12/15 indoor units	FB SERIES Filter Box with MERV 8 Filters
FBL 1-3	SEZ-KD18 indoor unit	FB SERIES Filter Box with MERV 8 Filters
ICM-326HM-2	MU-A09/12WA Outdoor Units	Low Ambient Head Pressure Fan Controller(application also requires a 30-40 watt crankcase heater)
MAC-1100FT	MS12/15/17NN	Air Cleaning Filter
MAC-1300FT	MS09TW	Air Cleaning Filter
MAC-1415FT-E	MSZ/Y-D30/36	Anti-Allergy Enzyme Filter (qty of 2)
MAC-1600DF	MS12/15/17NN	Deodorizing Filter
MAC-1700FT	MS/MSH24WN	Air Cleaning Filter
MAC-1800DF	MS09TW	Deodorizing Filter
MAC-2200DF	MS/MSH24WN	Deodorizing Filter
MAC-2300FT-E	MSZ/Y-A24	Anti-Allergy Enzyme Filter (qty of 2)
MAC-2310FT-E	MSZ/Y-GE24, MSZ-FE18	Anti-Allergy Enzyme Filter (qty of 2)
MAC-308FT-E	MSZ-FD09/12, MSZ-FE09/12, MSZ/Y-GE06/09/12/15/18	Platinum Catalyst Deodorizing Filter
MAC-333IF-E	MSZ, MSY, MFZ, SEZ, and SLZ	System Control Interface - MA, Contact terminal, and M-NET Control Adapter, Supplemental heat and humidifier adaptor,
MAC-408FT-E	MSZ/Y-GE06/09/12/15/18	Anti-Allergy Enzyme Filter (qty of 2)
MAC-415FT-E	MSZ/Y-A09/12/15/17, MFZ-KA09/12/18	Anti-Allergy Enzyme Filter
MAC-418FT-E	MSZ-FD09/12, MSZ-FE09/12	Anti-Allergy Enzyme Filter
MAC-640BH-U	MUZ-GE09/12/15, MUZ-FE09/12, SUZ-KA09/12/15	Outdoor Unit Drain Pan Heater used during defrost cycle
MAC-641BH-U	MUZ-GE18, SUZ-KA18	Outdoor Unit Drain Pan Heater used during defrost cycle
MAC-642BH-U	MUZ-GE24, MUZ-FE18	Outdoor Unit Drain Pan Heater used during defrost cycle
MAC-811DS	MUZ/Y-D30/36	Outdoor drain pan socket—Provides pipe connection to route condensate out of drain pan
MAC-856SG	MXZ-2B20/3B24/3B30/4B36	Outdoor air outlet guide for directing discharge air away from other outdoor unit
MAC-860DS	MUZ-FE09/12	Outdoor drain pan socket—Provides pipe connection to route condensate out of drain pan
MAC-886SG-E	MUZ-FE18, GE24	Outdoor air outlet guide for directing discharge air away from other outdoor unit
MAC-889SG	MUZ/Y-GE09/12/15/18/24, MUZ-FE09/12/18, MXZ-2B20	Outdoor air outlet guide for directing discharge air away from other outdoor unit
MAC-A454JP-E	All MXZ outdoor models and branch boxes	Port Adapter size: 3/8" X 1/2"
MAC-A455JP-E	All MXZ outdoor models and branch boxes	Port Adapter size: 1/2" X 3/8"
MAC-A456JP-E	All MXZ outdoor models and branch boxes	Port Adapter size: 1/2" X 5/8"
MCCH1	All M-Series indoor units equipped with MHK1 Controller	Portable Central Controller (PCC)—controls up to 16 RedLINK Zones—requires an MHK1 on each indoor unit
MHK1	All M-Series indoor units	Wireless wall-mounted remote controller (MRCH1) with a signal receiver (MIFH1) and cable (MRC1) all in one kit

ACCESSORY PART NUMBERS	USED WITH THESE MODELS	DESCRIPTIONS
MOS1	All M-Series indoor units equipped with MHK1 Controller	Outdoor Air Sensor—reads both outside temperature and humidity displayed on MRCH1 and MCCH1 if installed
MSDD-50AR-E	MXZ-8B48NA	Flared Connections for connecting two branch boxes
MSDD-50BR-E	MXZ-8B48NA	Brazed Connections for connecting two branch boxes
PAC-493PI	MXZ-3B30/4B36/8B48	Port Adapter size: 1/4" x 3/8"
PAC-715AD	All SEZ, SLZ indoor units	Wire for Remote on/off with CN32 connector
PAC-725AD	All SEZ, SLZ indoor units	Connector and wire for Operation status/error, booster fan control for fresh air using CN51
PAC-AKA31BC	MXZ-8B48NA only	Three Port Branch Box
PAC-AKA51BC	MXZ-8B48NA only	Five Port Branch Box
PAC-SE41TS-E	All SLZ indoor units	Remote temperature sensor for indoor units
PAC-SF40RM-E	All SEZ, SLZ indoor units	Remote Operation Adapter with wire terminals for remote on/off and operation status/error
PAC-SG59SG-E	MXZ-8B48NA (requires 2)	Outdoor air outlet guide for directing discharge air away from other outdoor unit
PAC-SG64DP-E	MXZ-8B48NA	External drain pan used for stacking Outdoor Units. Prevents drain water from dripping on the lower units
PAC-SG76RJ-E	MXZ-3B30/4B36/8B48	Port Adapter size: 3/8" x 5/8"
PAC-YT53CRAU	All MSZ/Y, MFZ, SEZ, SLZ, indoor units	Simple MA Remote Controller (requires MAC-333IF-E interface for MSY/Z and MFZ indoor units)
PAR-21MAAU	All M-Series Indoor Units	Multi-functional hard wired controller (used specifically for twinning, lead/lag, and 7 day programmable applications) Requires MAC-333IF-E Adaptor
PAR-FA32MA	All SEZ, SLZ indoor units	Wireless Signal Receiver used with PAR-FL32MA
PAR-FL32MA	All SEZ, SLZ indoor units	Wireless Remote Controller used with PAR-FA32MA
RCMKP1CB	All M-Series Indoor Units	Lockdown Bracket for wireless, hand-held, remote controllers
SI30-115	MS-A09/12, MSZ/Y, MFZ, indoor units	Mini-Condensation pump - 115 volt application
SI30-230	MS-A09/12, MSZ/Y, MFZ, indoor units	Mini-Condensation pump - 230 volt application
TAZ-MS303	All M-Series Indoor Units	3-Pole Disconnect Switch 30 Amps 600 volts rated for interrupting power supply at/near indoor unit - fits 2 X 4 utility box
ULTRILITE1	All MU, MUY/Z outdoor units, All SUZ outdoor units, and MXZ-2B,3B,4B outdoor units	Condensing Unit Mounting Pad 16" x 36" x 3"
ULTRILITE2	MXZ-8B48NA	Condensing Unit Mounting Pad 24" x 42" x 3"
X87-711	MS-A09/12WA indoor units	Advanced Blue Diamond Mini-Condensation pump w/ Reservoir & Sensor - 110 volt application
X87-721	All MSZ/Y, and all MFZ indoor units	Advanced Blue Diamond Mini-Condensation pump w/ Reservoir & Sensor - 208/230 volt application
Diamondback Line sets	Applied Models	Size and Length / Insulation
MLS143812T-15	MS-A09, MSZ-GE06, MSZ/Y-GE09/12, MSZ-FE09/12, SEZ-KD09/12, MFZ-KA09/12, SLZ-KA09/12	1/4 x 3/8 x 15' / 1/2" Twin-Tube Insulation
MLS143812T-30	MS-A09, MSZ-GE06, MSZ/Y-GE09/12, MSZ-FE09/12, SEZ-KD09/12, MFZ-KA09/13, SLZ-KA09/12	1/4 x 3/8 x 30' / 1/2" Twin-Tube Insulation
MLS143812T-50	MS-A09, MSZ-GE06, MSZ/Y-GE09/12, MSZ-FE09/12, SEZ-KD09/12, MFZ-KA09/14, SLZ-KA09/12	1/4 x 3/8 x 50' / 1/2" Twin-Tube Insulation
MLS143812T-65	MS-A09, MSZ-GE06, MSZ/Y-GE09/12, MSZ-FE09/12, SEZ-KD09/12, MFZ-KA09/15, SLZ-KA09/12	1/4 x 3/8 x 65' / 1/2" Twin-Tube Insulation
MLS141212T-15	MS-A12, MSZ/Y-GE15/18, MFZ-KA18, SEZ-KD15/18, SLZ-KA15	1/4 x 1/2 x 15' / 1/2" Twin-Tube Insulation
MLS141212T-30	MS-A12, MSZ/Y-GE15/18, MFZ-KA18, SEZ-KD15/18, SLZ-KA15	1/4 x 1/2 x 30' / 1/2" Twin-Tube Insulation
MLS141212T-50	MS-A12, MSZ/Y-GE15/18, MFZ-KA18, SEZ-KD15/18, SLZ-KA15	1/4 x 1/2 x 50' / 1/2" Twin-Tube Insulation
MLS141212T-65	MS-A12, MSZ/Y-GE15/18, MFZ-KA18, SEZ-KD15/18, SLZ-KA15	1/4 x 1/2 x 65' / 1/2" Twin-Tube Insulation
MLS141212T-100	MS-A12, MSZ/Y-GE15/18, MFZ-KA18, SEZ-KD15/18, SLZ-KA15	1/4 x 1/2 x 100' / 1/2" Twin-Tube Insulation
MPLS385812T-10	MSZ-FE18, MSZ/Y-GE24, MSZ/Y-D30/36	3/8 x 5/8 x 10' / 1/2" Twin-Tube Insulation
MPLS385812T-15	MSZ-FE18, MSZ/Y-GE24, MSZ/Y-D30/36	3/8 x 5/8 x 15' / 1/2" Twin-Tube Insulation
MPLS385812T-30	MSZ-FE18, MSZ/Y-GE24, MSZ/Y-D30/36	3/8 x 5/8 x 30' / 1/2" Twin-Tube Insulation
MPLS385812T-50	MSZ-FE18, MSZ/Y-GE24, MSZ/Y-D30/36	3/8 x 5/8 x 50' / 1/2" Twin-Tube Insulation
MPLS385812T-65	MSZ-FE18, MSZ/Y-GE24, MSZ/Y-D30/36	3/8 x 5/8 x 65' / 1/2" Twin-Tube Insulation
MPLS385812T-100	MSZ-FE18, MSZ/Y-GE24, MSZ/Y-D30/36	3/8 x 5/8 x 100' / 1/2" Twin-Tube Insulation

# SPECIFICATIONS

## SINGLE-ZONE | MS Indoor Unit Cooling Only



### NON-INVERTER

Model Name	Indoor Unit		MS-A09WA	MS-A12WA	
	Outdoor Unit		MU-A09WA	MU-A12WA	
Cooling *1	Rated Capacity	Btu/h	9,500	12,000	
	Capacity Range	Btu/h	-	-	
	Total Input	W	870	1,070	
	Energy Efficiency	SEER	13		
	Moisture Removal	Pints/h	2.7	3.2	
	Sensible Heat Factor		0.68	0.70	
Power Supply	Phase, Cycle, Voltage		1 Phase, 60Hz, 115V *2		
Voltage	Indoor - Outdoor L1-N		AC 115V		
	Indoor - Outdoor N-2		AC 115V		
	Indoor - Remote Controller		Wireless Type		
Indoor Unit	MCA	A	1.2		
	Blower Motor	F.L.A.	0.95		
	Airflow (Lo-Med-Hi-Powerful)	DRY (CFM)	183-261-335-367	222-286-406-446	
		WET (CFM)	162-233-300-328	198-254-363-399	
	Sound Pressure Level (Lo-Med-Hi-Powerful)	dB(A)	26-32-40-42	33-38-45-47	
	External Finish Color		Munsell No. 1.0Y 9.2/0.2		
	Dimension Unit	W: In.	30-11/16		
		D: In.	8-1/4		
		H: In.	11-3/4		
	Weight Unit	Lbs.	23		
Field Drainpipe Size O.D.	In.	5/8			
Remote Controller	Type		-		
Outdoor Unit	MCA	A	14	16	
	MOCP	(Time Delay) A	15	20	
	Blower Motor	F.L.A.	0.63	0.93	
	Compressor	Model (Type)		Single Rotary	
		R.L.A.		9.3	10.82
		L.R.A.		47	56
	Airflow	CFM	1,083	1,327	
	Refrigerant Control		Capillary Tube		
	Sound Pressure Level (Cooling) *1	dB(A)	47	52	
	External Finish Color		Munsell No. 3Y 7.8/1.1		
	Dimensions	W: In.	31-1/2	33-7/16	
		D: In.	11-1/4	11-7/16	
		H: In.	21-5/8	23-13/16	
Weight	Lbs.	78	96		
Refrigerant	Type		R410A		
	Charge	Lbs., Oz.	2, 5	3, 1	
	Oil	Type (Fl. Oz.)	NE022 (10.8)		
Refrigerant Pipe	Gas Side O.D.	In.	3/8	1/2	
	Liquid Side O.D.		1/4		
	Height Difference (Max.)	Ft.	35		
	Length (Max.)		65		
Connection Method	Indoor/Outdoor		Flared/Flared		

NOTES: Test conditions are based on AHRI 210/240.

\*1. Rating conditions (cooling) - Indoor D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

\*2. Indoor units receive power from outdoor units through field-supplied interconnected wiring. Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

# SINGLE-ZONE | MSY Indoor Unit

## Cooling Only



Model Name	Indoor Unit		MSY-GE09NA-8	MSY-GE12NA-8	MSY-GE15NA-8	MSY-GE18NA-8	MSY-GE24NA	MSY-D30NA-8	MSY-D36NA-8	
	Outdoor Unit		MUY-GE09NA	MUY-GE12NA	MUY-GE15NA-1	MUY-GE18NA-1	MUY-GE24NA	MUY-D30NA-1	MUY-D36NA-1	
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	14,000	17,200	22,500	30,700	34,600	
	Capacity Range	Btu/h	3,800-12,200	3,800-13,600	3,100-18,200	3,700-18,700	8,200-31,400	9,800-30,700	9,800-34,600	
	Total Input	W	660 (205-1,200)	960 (205-1,300)	1,080 (160-2,000)	1,640 (240-2,070)	1,800 (570-3,580)	3,380 (620-3,380)	4,240 (620-4,240)	
	Energy Efficiency	SEER	21	20.5	21	19.2	19	16	15.1	
	Moisture Removal	Pints/h	1.5	2.5	2.7	4.6	5.1	9.9	11.9	
	Sensible Heat Factor		0.82	0.74	0.80	0.71	0.75	0.64	0.62	
Power Supply	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V *2							
Voltage	Indoor - Outdoor S1 - S2		AC 208 / 230V							
	Indoor - Outdoor S2 - S3		DC12-24V							
	Indoor - Remote Controller		Wireless Type (Optional Wired Controller: DC 12V)							
Indoor Unit	MCA	A	1.0							
	Blower Motor	F.L.A.	0.76							
	Airflow at Cooling (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful)*1	DRY (CFM)	145-170-237-321-399		205-272-335-420-533	230-275-339-420-533	388-469-628-738		389-639-848-887	
		WET (CFM)	109-134-201-286-364		170-237-300-385-498	194-240-304-385-498	347-420-562-661		350-576-763-798	
	Sound Pressure Level at Cooling (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful) *1	dB(A)	19-22-30-37-43	19-22-30-37-45	26-32-38-44-49	28-33-38-44-49	34-41-49-53		32-42-49-51	
	External Finish Color		Munsell No. 1.0Y 9.2 / 0.2							
	Dimension Unit	W: In.	31-7/16				43-5/16		46-1/16	
		D: In.	9-1/8				9-3/8		11-5/8	
		H: In.	11-5/8				12-13/16		14-3/8	
	Weight Unit	Lbs.	22				37		40	
Field Drainpipe Size O.D.	In.	5/8								
Remote Controller	Type		Hand-held Wireless Remote Controller (Optional MHK1 Backlit Wireless Wall-mounted Remote Controller)							
Outdoor Unit	MCA	A	12			14	17.1	21		
	MOCP	A	15				20	25		
	Blower Motor	F.L.A.	0.50			0.93				
	Compressor	Model (Type)	DC INVERTER-driven			DC INVERTER-driven Twin Rotary				
		R.L.A.	4.9			6.8	10.0	12.9		16
		L.R.A.	6.1			8.5	12.5	16.1		20
	Airflow (Cooling)	CFM	1,151	1,229	1,243	1,730	1,769		1,941	
	Refrigerant Control		Linear Expansion Valve							
	Sound Pressure Level at Cooling *1	dB(A)	46	49		54	55		56	
	External Finish Color		Munsell No. 3Y 7.8 / 1.1							
	Dimensions	W: In.	31-1/2			33-1/16				
		D: In.	11-1/4			13	13		13	
		H: In.	21-5/8			33-7/16		34-5/8		33-7/16
Weight	Lbs.	66	77	80	119		126			
Refrigerant	Type	R410A								
	Charge	Lbs., Oz.	1, 12	2, 9		3, 7	4, 3		4	
	Oil	Type (fl. oz.)	NEO22 (10.8)		NEO22 (15.2)		FV50S (13.52)		NEO22 (29.4)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2		5/8			
	Liquid Side O.D.	In.	1/4		1/4		3/8			
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50				
	Length (Max.)	Ft.	65			100				
Connection Method	Indoor/Outdoor		Flared/Flared							

NOTES: Test conditions are based on AHRI 210/240.

\*1. Rating conditions (cooling) - Indoor D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

\*2. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

\$ = Federal Tax Credit

# SINGLE-ZONE | MSZ Indoor Unit

## Heat Pump



Model Name	Indoor Unit		MSZ-FE09NA-8	MSZ-FE12NA-8	MSZ-FE18NA	MSZ-GE09NA-8	MSZ-GE12NA-8	
	Outdoor Unit		MUZ-FE09NA-1	MUZ-FE12NA1	MUZ-FE18NA	MUZ-GE09NA	MUZ-GE12NA	
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	18,000	9,000	12,000	
	Capacity Range	Btu/h	2,800-9,000	2,800-12,000	8,200-25,200	3,800-12,200	3,800-13,600	
	Total Input	W	580 (160-650)	930 (160-960)	1,270 (570-2,280)	660 (205-1,200)	960 (205-1,300)	
	Energy Efficiency	SEER	26	23	20.2	21	20.5	
	Moisture Removal	Pints/h	2.1	2.9	2.7	1.5	2.5	
	Sensible Heat Factor		0.76	0.73	0.84	0.82	0.74	
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	13,600	21,600	10,900	14,400	
	Capacity Range	Btu/h	3,000-18,000	3,000-21,000	7,500-29,700	4,500-14,100	5,500-18,100	
	Total Input	W	710 (150-2,250)	950 (150-2,250)	1,540 (520-2,240)	760 (255-1,200)	1,170 (340-1,660)	
	HSPF (I/V)	Btu/h/W	10	10.5	10.3	10		
Heating at 17° F *3	Rated Capacity	Btu/h	6,700	7,900	11,700	6,600	8,800	
	Rated Total Input	W	650	750	1,240	700	900	
	Maximum Capacity	Btu/h	12,500	13,600	21,600	8,700	11,200	
Heating at 5° F	Maximum Capacity	Btu/h	10,900	13,600	21,600	7,061	9,194	
Power Supply	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V *4					
Voltage	Indoor - Outdoor S1 - S2		AC 208 / 230V					
	Indoor - Outdoor S2 - S3		DC12-24					
	Indoor - Remote Controller		Wireless Type (Optional Wired Controller: DC12V)					
Indoor Unit	MCA	A	1.0					
	Blower Motor	F.L.A.	0.76					
	Airflow at Cooling (Lo-Med-Hi-Super HI-Powerful) *1	DRY (CFM)	162-226-339-381	162-226-381-410	388-469-628-738	145-170-237-321-399	145-170-237-321-399	
		WET (CFM)	144-202-307-343	144-202-350-367	347-420-562-661	109-134-201-286-364	109-134-201-286-364	
	Airflow at Heating (Lo-Med-Hi-Super HI-Powerful) *2	WET (CFM)	166-240-367-381	166-240-399-420	388-469-628-738	145-170-237-321-406	145-170-237-321-406	
		Sound Pressure Level at Cooling (Lo-Med-Hi-Super HI-Powerful) *1	dB(A)	22-31-39-42	22-33-43-45	34-41-49-53	19-22-30-37-43	19-22-30-37-45
	Sound Pressure Level at Heating (Lo-Med-Hi-Super HI-Powerful) *2	dB(A)	22-31-40-42	22-33-43-44	32-41-49-52	19-22-30-37-43	19-22-30-37-43	
	External Finish Color		Munsell No. 1.0Y 9.2 / 0.2					
	Dimension Unit	W: In.	31-3/8			43-5/16		31-7/16
		D: In.	10-1/8			9-3/8		9-1/8
		H: In.	11-5/8			12-13/16		11-5/8
Weight Unit	Lbs.	27			37		22	
Field Drainpipe Size O.D.	In.	5/8						
Remote Controller	Type		Hand-held Wireless Remote Controller (Optional MHK1 Backlit Wireless Wall-mounted Remote Controller)					
Outdoor Unit	MCA	A	12		17.1		12	
	MOCP	A	15		20		15	
	Blower Motor	F.L.A.	0.56		0.93		0.50	
	Compressor	Model (Type)	DC INVERTER-driven Twin Rotary				DC INVERTER-driven	
		R.L.A.	8.6		12.9		6.6	
		L.R.A.	10.8		16.1		8.2	
	Airflow (Cooling/Heating)	CFM	1,102 / 1,187		1,769 / 1,701		1,151 / 1,225	1,229 / 1,172
	Refrigerant Control	Linear Expansion Valve						
	Defrost Method	Reverse Cycle						
	Sound Pressure Level at Cooling *1	dB(A)	48		55		46	49
	Sound Pressure Level at Heating *2	dB(A)	49		55		50	51
	External Finish Color		Munsell No. 3Y 7.8 / 1.1					
	Dimensions	W: In.	31-1/2			33-1/16		31-1/2
		D: In.	11-1/4			13		11-1/4
H: In.		21-5/8			34-5/8		21-5/8	
Weight	Lbs.	80		119		66	77	
Refrigerant	Type	R410A						
	Charge	Lbs., Oz.	2, 9		4, 3		1, 12	2, 9
	Oil	Type (fl. oz.)	NE022 (15.2)		FV50S (13.5)		NE022 (10.8)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8		5/8		3/8	
	Liquid Side O.D.	In.	1/4		3/8		1/4	
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40		50		40	
	Length (Max.)	Ft.	65		100		65	
Connection Method	Indoor/Outdoor		Flared/Flared					

NOTES: Test conditions are based on AHRI 210/240.

\*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C);  
Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

\*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

\*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

\*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

\$ = Federal Tax Credit

# SINGLE-ZONE | MSZ Indoor Unit (CONT.)

## Heat Pump



Model Name	Indoor Unit		MSZ-GE15NA-8	MSZ-GE18NA-8	MSZ-GE24NA	MSZ-D30NA-8	MSZ-D36NA-8	
	Outdoor Unit		MUZ-GE15NA-1	MUZ-GE18NA-1	MUZ-GE24NA	MUZ-D30NA-1	MUZ-D36NA-1	
Cooling *1	Rated Capacity	Btu/h	14,000	17,200	22,500	30,700	33,200	
	Capacity Range	Btu/h	3,100-18,200	3,700-18,700	8,200-31,400	9,800-30,700	9,800-33,200	
	Total Input	W	1,080 (160-2,000)	1,640 (240-2,070)	1,800 (570- 3,580)	3,850 (620-3,850)	4,360 (620-4,360)	
	Energy Efficiency	SEER	21	19.2	19.0	14.5		
	Moisture Removal	Pints/h	2.7	4.6	5.1	9.9	11.3	
	Sensible Heat Factor		0.80	0.71	0.75	0.64	0.62	
Heating at 47° F *2	Rated Capacity	Btu/h	18,000	21,600	27,600	32,600	35,200	
	Capacity Range	Btu/h	4,800-20,900	3,500-25,200	7,500-36,900	8,700-34,000	8,700-36,000	
	Total Input	W	1,600 (270-2,010)	1,900 (230-2,680)	2,340 (520- 3,650)	3,360 (520-3,600)	3,840 (520-4,100)	
	HSPF (Region IV)	Btu/h/W	10				8.2	
Heating at 17° F *3	Rated Capacity	Btu/h	11,300	13,400	16,000	19,500	21,800	
	Rated Total Input	W	1,150	1,450	1,770	2,620 *5	3,000 *5	
	Maximum Capacity	Btu/h	15,900	17,200	24,600	20,800	22,800	
Heating at 5° F	Maximum Capacity	Btu/h	13,022	13,562	21,160	16,305	19,090	
Power Supply	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V *4					
Voltage	Indoor - Outdoor S1-S2		AC 208 / 230V					
	Indoor - Outdoor S2-S3		DC12-24					
	Indoor - Remote Controller		Wireless Type (Optional Wired Controller: DC12V)					
Indoor Unit	MCA	A	1.0					
	Blower Motor	F.L.A.	0.76					
	Airflow at Cooling (Lo-Med-Hi-Super HI-Powerful) *1	DRY (CFM)	205-272-335-420-533	230-275-339-420-533	388-469-628-738	389-639-848-887		
		WET (CFM)	170-237-300-385-498	194-240-304-385-498	347-420-562-661	350-576-763-798		
	Airflow at Heating (Lo-Med-Hi-SuperHI-Powerful) *2	DRY (CFM)	205-247-304-367-463	230-275-339-431-512	388-469-628-738	445-639-848-887		
	Sound Pressure Level (Cooling) (Lo-Med-Hi-Super HI-Powerful) *1	dB(A)	26-32-38-44-49		28-33-38-44-49	34-41-49-53	32-42-49-51	
			26-30-35-40-46		28-33-38-44-49	32-41-49-52	34-42-49-50	
	External Finish Color		Munsell No. 1.0Y 9.2/0.2					
	Dimension Unit	W: In.	31-7/16	31-7/16	43-5/16	46-1/16		
		D: In.	9-1/8	9-1/8	9-3/8	11-5/8		
H: In.		11-5/8		12-13/16	14-3/8			
Weight Unit	Lbs.	22		37	40			
Field Drainpipe Size O.D.	In.	5/8						
Remote Controller	Type		Hand-held Wireless Remote Controller (Optional MHK1 Backlit Wireless Wall-mounted Remote Controller)					
Outdoor Unit	MCA	A	12	14	17.1	21		
	MOCAP	A	15		20	25		
	Blower Motor	F.L.A.	0.50	0.93				
	Compressor	Model (Type)		DC INVERTER-driven Twin Rotary				
		R.L.A.	7.4	10.0	12.9	16		
		L.R.A.	9.3	12.5	16.1	20		
	Airflow	CFM	1,243 / 1,229	1,730 / 1,659	1,769 / 1,701	1,941		
	Refrigerant Control	Linear Expansion Valve						
	Defrost Method	Reverse Cycle						
	Sound Pressure Level at Cooling *1	dB(A)	49	54	55	56		
	Sound Pressure Level at Heating *2	dB(A)	51	56	55	57		
	External Finish Color		Munsell No. 3Y 7.8/1.1					
	Dimensions	W: In.	31-1/2	33-1/16				
D: In.		11-1/4	13					
H: In.		21-5/8	33-7/16	33-7/16				
Weight	Lbs.	80	119		141			
Refrigerant	Type		R410A					
	Charge	Lbs., Oz.	2, 9	3, 7	4, 3	4, 10		
	Oil	Type (Fl. Oz.)	NE022 (15.2)		FV50S (13.5)	NE022 (29.4)		
Refrigerant Pipe	Gas Side O.D.	In.	1/2		5/8			
	Liquid Side O.D.		1/4		3/8			
	Height Difference (Max.)	Ft.	40	50				
	Length (Max.)		65	100				
Connection Method	Indoor/Outdoor		Flared/Flared					

NOTES: Test conditions are based on AHRI 210/240.  
 \*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C);  
 Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).  
 \*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
 Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).  
 \*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
 Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

\*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.  
 \*5. Maximum Total Input  
 Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

\$ = Federal Tax Credit

# SINGLE-ZONE | SEZ Indoor Unit

## Heat Pump



Model Name	Indoor Unit		SEZ-KD09NA4	SEZ-KD12NA4	SEZ-KD15NA4	SEZ-KD18NA4
	Outdoor Unit		SUZ-KA09NA	SUZ-KA12NA	SUZ-KA15NA	SUZ-KA18NA
Cooling *1	Rated Capacity	Btu/h	8,100	11,500	14,100	17,200
	Capacity Range	Btu/h	3,800-10,900	3,800-13,300	3,800-17,000	3,800-19,000
	Total Input	W	670	920	1,170	1,380
	Energy Efficiency	SEER	15	16	15.5	17.5
	Moisture Removal	Pints/h	1.5	2.4	2.6	3.4
	Sensible Heat Factor		0.80	0.76	0.80	0.79
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	13,600	18,000	21,600
	Capacity Range	Btu/h	4,800-14,100	4,800-16,400	4,800-21,100	4,800-24,900
	Total Input	W	1,020	1,140	1,500	1,700
	HSPF (IV)	Btu/h/W	10.0			
Heating at 17° F *3	Rated Capacity	Btu/h	6,700	9,000	11,900	13,100
	Rated Total Input	W	810	920	1,200	1,350
	Maximum Capacity	Btu/h	6,700	9,000	11,900	13,100
Power Supply	Phase, Cycle, Voltage	1 Phase, 60Hz, 208 / 230V *4				
Voltage	Indoor - Outdoor S1 - S2	AC 208-230V				
	Indoor - Outdoor S2 - S3	DC 12-24V				
Indoor Unit	MCA	A	1			
	Blower Motor	F.L.A.	0.51	0.57	0.74	
	Airflow at Cooling/Heating (Lo-Med-Hi)	DRY (CFM)	194-247-317	247-317-388	353-441-529	423-529-635
		WET (CFM)	174-222-285	222-285-349	317-396-476	381-476-572
	External Static Pressure *3	In. W.G.	0.02-0.06-0.14-0.20			
	Sound Pressure Level (Lo-Med-Hi)	dB(A)	23-26-30	23-28-33	30-34-37	30-34-38
	External Finish		Galvanized-Steel Sheets			
	Dimension Unit	W: In.	31-1/8	39		46-7/8
		D: In.	27-9/16			
		H: In.	7-7/8			
	Weight Unit	Lbs.	42	50	54	62
	Drain-lift Mechanism	H: In.	21-11/16			
Field Drainpipe Size O.D.	In.	1-1/4				
Remote Controller	Type	Select from MHK1 (Preferred), PAR-21MA, or PAR-FL/FA32 Remote Controllers				
Outdoor Unit	MCA	A	12		14	
	MOCP	A	15			
	Blower Motor	F.L.A.	0.50		0.93	
	Compressor	Model (Type)	DC Inverter		DC Inverter Twin Rotary	
		R.L.A.	6.6		7.4	10
		L.R.A.	8.2		9.3	12.5
	Airflow (Cooling/Heating)	CFM	1,151/1,225	1,229/1,172	1,243/1,229	1,730/1,659
	Refrigerant Control		Linear Expansion Valve			
	Defrost Method		Reverse Cycle			
	Sound Pressure Level at Cooling *1	dB(A)	46	49		54
	Sound Pressure Level at Heating *2	dB(A)	50	51		56
	External Finish Color		Munsell No. 3Y 7.8/1.1			
	Dimensions	W: In.	31-1/2		33-1/6	
		D: In.	11-1/4		13	
		H: In.	21-5/8		33-7/16	
Weight	Lbs.	66	77	80	119	
Refrigerant	Type	R410A				
	Charge	Lbs., Oz.	2	2, 9		4
	Oil	Type (fl. oz.)	NE022 (10.8)		NE022 (15.2)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	
	Liquid Side O.D.	In.	1/4			
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40		50	
	Length (Max.)	Ft.	65		100	
Connection Method	Indoor/Outdoor	Flared/Flared				

NOTES: Test conditions are based on AHRI 210/240.

\*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C);  
Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

\*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

\*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

\*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.


Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

\$ = Federal Tax Credit



# SEZ Static Performance Curves

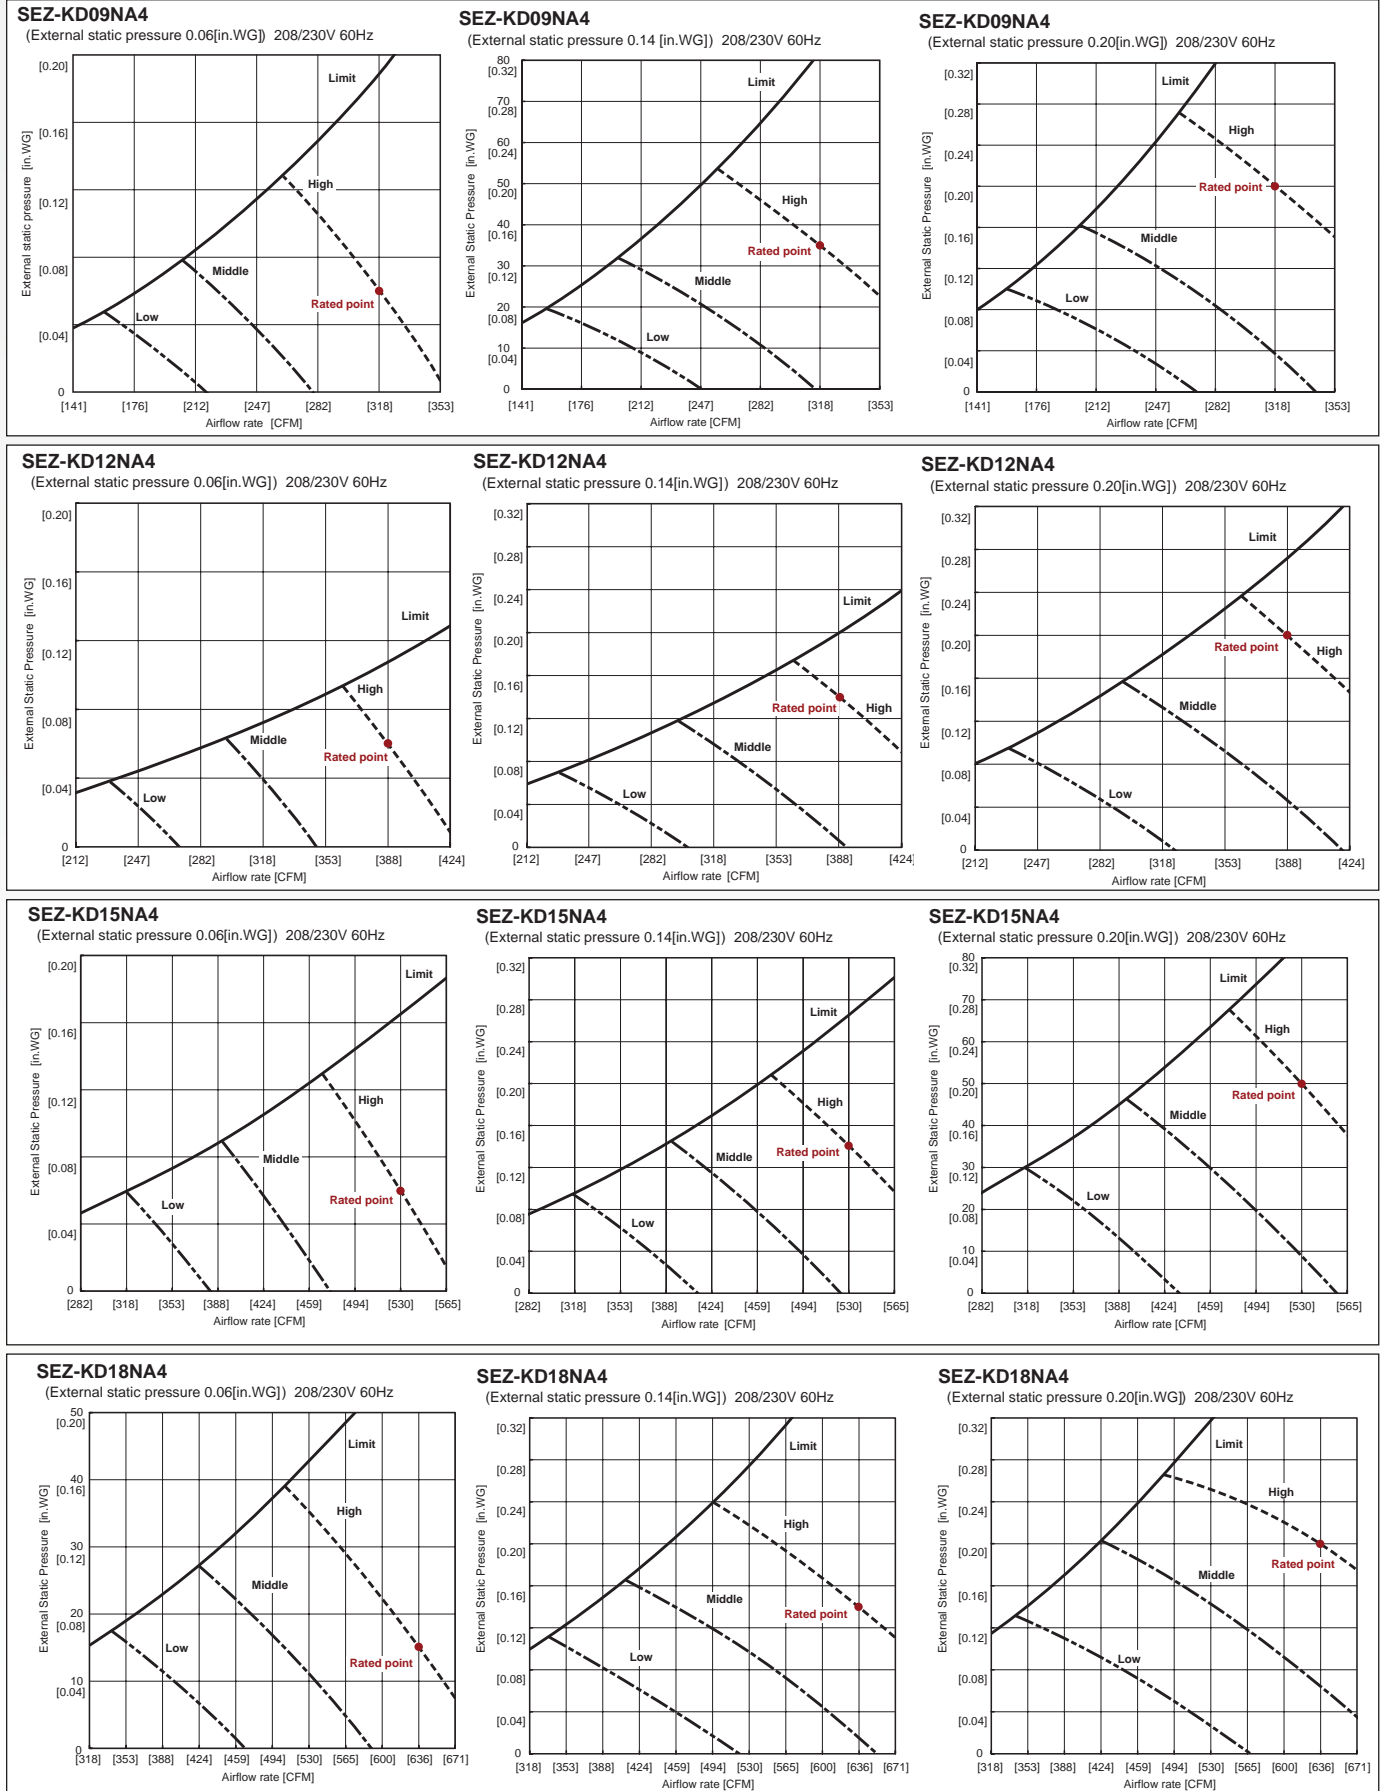

# SINGLE-ZONE | SLZ Indoor Unit

## Heat Pump



Model Name	Indoor Unit		SLZ-KA09NA	SLZ-KA12NA	SLZ-KA15NA	
	Outdoor Unit		SUZ-KA09NA	SUZ-KA12NA	SUZ-KA15NA	
Cooling *1	Rated Capacity	Btu/h	8,400	11,100	15,000	
	Capacity Range	Btu/h	3,100-10,900	3,400-13,300	3,800-17,700	
	Total Input	W	700	920	1,460	
	Energy Efficiency	SEER	15	15.4	16	
	Moisture Removal	Pints/h	1.2	2.3	4.5	
	Sensible Heat Factor		0.84	0.77	0.67	
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	13,600	18,000	
	Capacity Range	Btu/h	3,100-14,100	3,100-17,100	3,100-22,000	
	Total Input	W	930	1,180	1,950	
	HSPF (IV)	Btu/h/W		9.6		
Heating at 17° F *3	Rated Capacity	Btu/h	6,200	8,300	10,200	
	Rated Total Input	W	740	930	1,310	
	Maximum Capacity	Btu/h	6,200	8,300	12,000	
Power Supply	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V *4			
Voltage	Indoor - Outdoor S1 - S2		AC 208-230V			
	Indoor - Outdoor S2 - S3		DC 12-24V			
Indoor Unit	MCA	A	1			
	Blower Motor	F.L.A.	0.23	0.28	0.28	
	Airflow at Cooling/Heating (Lo-Med-Hi)	DRY (CFM)		280-320-350	280-320-390	280-320-390
		WET (CFM)		250-290-320	250-290-350	250-290-350
	Sound Pressure Level	dB(A)	29-32-38	30-34-39	31-35-40	
	External Finish	Galvanized-Steel Sheets; Grille: Munsell 6.4Y 8.9/0.4				
	Dimension Unit (Grille)	W: In.	22-7/16 (25-5/8)			
		D: In.	22-7/16 (25-5/8)			
		H: In.	9-1/4 (13/16)			
	Weight Unit (Grille)	Lbs.	36 (7)			
	Drain-lift Mechanism (Included)	H: In.	19-11/16			
Field Drainpipe Size O.D.	In.	1-1/4				
Remote Controller	Type		Select from MHK1 (Preferred), PAR-21MA, or PAR-FL/FA32 Remote Controllers			
Outdoor Unit	MCA	A	12			
	MOCOP	A	15			
	Blower Motor	F.L.A.	0.50			
	Compressor	Model (Type)	DC INVERTER-driven		DC INVERTER-driven Twin Rotary	
		R.L.A.	6.6		7.4	
		L.R.A.	8.2		9.3	
	Airflow (Cooling/Heating)	CFM	1,151/1,225	1,229/1,172	1,243/1,229	
	Refrigerant Control	Linear Expansion Valve				
	Defrost Method	Reverse Cycle				
	Sound Pressure Level at Cooling *1	dB(A)	46	49		
	Sound Pressure Level at Heating *2	dB(A)	50	51		
	External Finish Color	Munsell No. 3Y 7.8/1.1				
	Dimensions	W: In.	31-1/2			
		D: In.	11-1/4			
H: In.		21-5/8				
Weight	Lbs.	66	77	80		
Refrigerant	Type	R410A				
	Charge	Lbs., Oz.	2, 9			
	Oil	Type (fl. oz.)	NEO22 (10.8)		NEO22 (15.2)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8			
	Liquid Side O.D.	In.	1/4			
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			
	Length (Max.)	Ft.	65			
Connection Method	Indoor/Outdoor		Flared/Flared			

NOTES: Test conditions are based on AHRI 210/240.

\*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C);  
Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

\*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

\*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);  
Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

\*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

Note: ESP at 208/230V, 60 Hz. See manual for Static Performance Curve, including at 0.02 in W.G.

# MULTI-ZONE | MXZ-B

## Heat Pump



Model Name		Outdoor Unit		MXZ-2B20NA-1 *5	MXZ-3B24NA-1 *6	MXZ-3B30NA-1	MXZ-4B36NA-1 *7	
Indoor Unit	Cooling *1 Non-ducted/Ducted	Rated Capacity	Btu/h	18,000/20,000	22,000/23,600	28,400/27,400	35,400/34,400	
		Capacity Range	Btu/h	7,800-20,000	12,600-25,500	12,600-28,400	12,600-36,400	
		Total Input	W	2,190 (630-2,190)	2,460 (1,000-2,950)	3,330 (1,000-3,330)	3,940 (1,000-4,020)	
	Heating at 47° F *2 Non-ducted/Ducted	Rated Capacity	Btu/h	22,000/22,000	25,000/24,600	28,600/27,600	36,000/34,400	
		Capacity Range	Btu/h	8,500-25,500	11,400-30,600	11,400-36,000	11,400-43,000	
		Total Input	W	2,620 (520-2,620)	1,900 (740-2,600)	2,220 (740-2,820)	3,100 (740-3,940)	
	Heating at 17° F *3 Non-ducted/Ducted	Rated Capacity	Btu/h	12,500/12,500	14,000/14,000	16,000/15,100	22,200/20,300	
		Rated Total Input	W	1,350/1,430	1,380/1,570	2,120/2,140	2,430/2,340	
		Maximum Capacity	Btu/h	14,500/12,500	18,800/17,000	18,800/18,000	24,600/25,400	
		Maximum Total Input	W	1,500/1,430	2,120/2,230	2,120/2,140	3,340/3,450	
Heating at 5° F	Maximum Capacity	Btu/h	11,113	13,336	15,704	18,671		
Power Supply	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V *8					
Voltage	Indoor - Outdoor S1 - S2		AC 208 / 230V					
	Indoor - Outdoor S2 - S3		DC12-24V					
Outdoor Unit *4	MCA	A	15	18		23		
	MOCP	A	20		25			
	Fan Motor	F.L.A.	0.96	0.93				
	Compressor	Model (Type)	DC INVERTER-driven Twin Rotary					
		R.L.A.	10.1	11		14.4		
		L.R.A.	15					
	Airflow (Cooling/Heating)	CFM	1,485/1,640	2,068/1,605	1,365/1,605		2,068/2,068	
	Refrigerant Control	Linear Expansion Valve						
	Defrost Method	Reverse Cycle						
	Sound Pressure Level at Cooling *1	dB(A)	49	54	49		54	
	Sound Pressure Level at Heating *2	dB(A)	51	49			57	
	External Finish Color	Munsell No. 3.0Y 7.8 / 1.1						
	Dimensions	W: In.	33-1/16	35-7/16				
		D: In.	13	12-5/8				
H: In.		27-15/16	35-7/16					
Weight	Lbs.	130	150		153			
Indoor Unit	No. of Units	2		2, 3	2, 3		2, 3, 4	
Remote Controller	Type	Associated with the Indoor Unit						
Refrigerant	Type	R410A						
	Charge	Lbs., Oz.	5, 15	7, 11		8, 13		
Refrigerant Pipe	Gas Side O.D.	In.	A,B: 3/8	A: 1/2; B,C: 3/8		A: 1/2; B,C,D: 3/8		
	Liquid Side O.D.	In.	1/4					
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	49/33 *9					
	Lineset length for each individual indoor unit (Max.)	Ft.	82					
	Length (Max.)	Ft.	164 (A+B)	230 (A+B+C)		230 (A+B+C+D)		
Connection Method	Indoor/Outdoor		Flared/Flared					

NOTES: Test conditions are based on AHRI 210/240. One indoor unit is turned off during low-speed testing under the new test conditions. **Systems actually exhibit higher energy efficiencies during normal operation.**

- \*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).
- \*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).
- \*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).
- \*4. Refer to pages 12 and 13 for Indoor Unit specifications.

- \*5. Data from combination of two Indoor Units 9,000 Btu/h (non-ducted) or one 9,000 Btu/h and one 12,000 Btu/h (ducted).
- \*6. Data from combination of two Indoor Units 6,000 Btu/h and one 9,000 Btu/h (non-ducted) or three 9,000 Btu/h (ducted).
- \*7. Data from combination of four Indoor Units 9,000 Btu/h (non-ducted and ducted).
- \*8. Indoor units receive power from outdoor units through field-supplied interconnected wiring.
- \*9. 49' Applies to installations where the outdoor unit is installed below the indoor unit.

Power factor equals 97%.

Specifications are subject to change without notice

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

## Multi-zone Efficiency Ratings

Model	Indoor Unit Type	SEER	HSPF
MXZ-2B20NA-1	Non-ducted	18	8.9
	Ducted and Non-ducted	16.75	8.7
	Ducted	15.5	8.5
MXZ-2B20NA-1 ENERGY STAR®	2 x MSZ-GE09NA-8	18	8.9
MXZ-3B24NA-1	Non-ducted	17.5	9.3
	Ducted and Non-ducted	16.25	8.9
	Ducted	15.0	8.5
MXZ-3B24NA-1 ENERGY STAR®	2 x MSZ-GE06NA-8 1 x MSZ-GE09NA-8	17.5	9.3
MXZ-3B24NA-1 ENERGY STAR®	2 x MSZ-GE06NA-8 1 x MSZ-GE12NA-8	17.5	9.3

Model	Indoor Unit Type	SEER	HSPF
MXZ-3B30NA-1	Non-ducted	17.5	10.5
	Ducted and Non-ducted	16	10.0
	Ducted	14.5	9.5
MXZ-4B36NA-1	Non-ducted	18	9.3
	Ducted and Non-ducted	16.5	9.2
	Ducted	15.0	9.0
MXZ-8B48NA	Non-ducted	15	8.7
	Ducted and Non-ducted	14.8	8.8
	Ducted	14.7	8.9

# MULTI-ZONE | MXZ-B Heat Pump



Model Name		Outdoor Unit		MXZ-8B48NA	
Indoor Unit	Cooling *1 Non-ducted/Ducted	Rated Capacity	Btu/h	48,000 / 48,000	
		Rated Total Input	W	5,780 / 6,470	
		Maximum Capacity	Btu/h	54,000	
	Heating at 47° F *2 Non-ducted/Ducted	Rated Capacity	Btu/h	54,000 / 54,000	
		Rated Total Input	W	4,820 / 5,270	
		Maximum Capacity	Btu/h	60,000	
	Heating at 17° F *3 Non-ducted/Ducted	Rated Capacity	Btu/h	33,000 / 34,700	
		Rated Total Input	W	2,950 / 3,390	
		Maximum Capacity	Btu/h	36,600 / 36,500	
	Heating at 5° F	Maximum Capacity	Btu/h	32,400	
Power Supply		Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V	
Voltage		Indoor - Outdoor S1 - S2		AC 208-230V	
		Indoor - Outdoor S2 - S3		DC12-24V	
Outdoor Unit		MCA		A	
		Recommended Fuse/Breaker Size		A	
		Fan Motor		Type x Quantity	Propeller x 2
				Motor Output (kW)	0.086 + 0.086
		Compressor		Model (Type)	DC INVERTER-driven Scroll
				Motor Output (kW)	2.9
		Airflow (Cooling/Heating)		CFM	3,530
		Refrigerant Control		Linear Expansion Valve	
		Sound Pressure Level at Cooling *1		dB(A)	54
		Sound Pressure Level at Heating *2		dB(A)	55
		External Finish Color		Munsell No. 3Y 7.8 / 1.1	
		Dimensions		W: In.	37-7/16
				D: In.	13+1-3/16
				H: In.	53-3/16
Weight		Lbs.	278		
Total Capacity 22%-130%		Btu/h	12,000 - 70,200		
Indoor Unit		Total Connected Capacity		6,000- 24,000 / 2-8	
Remote Controller		Type		Associated with Indoor Unit Model	
Refrigerant		Type		R410A	
		Charge	Lbs., Oz.	18, 11.2	
Oil		Type (fl. oz.)		FV50S (73)	
		Gas Side O.D.		In.	
Refrigerant Pipe		Liquid Side O.D.		In.	
Refrigerant Pipe Length		Height Difference (Max.)		Ft.	
		Maximum distance between (Outdoor unit and farthest indoor unit)		Ft.	
		Maximum pipe length - Branch box to Indoor Unit		Ft.	
		Total maximum line length between branch box and all connected indoor units		Ft.	
		Length from outdoor unit to branch box (Max.)		Ft.	
		Total length (Max.)		Ft.	
Connection Method		Indoor/Outdoor		Flared/Flared	

NOTES: Test conditions are based on AHRI 210/240. One indoor unit is turned off during low-speed testing under the new test conditions. Systems actually exhibit higher energy efficiencies during normal operation.

- \*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).
- \*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).
- \*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).
- \*4. 66' applies to installations when the outdoor unit is installed below the indoor unit.

Power factor equals 97%.

Specifications are subject to change without notice.

**Note: Maximum connected capacity is the maximum total of all connected indoor units, NOT the maximum capacity produced.**



Only a single lineset is needed from the outdoor unit to branch box.

See page 34 for MXZ-B efficiency information

## Branch Boxes:

(At least one branch box required)



PAC-AKA51BC



PAC-AKA31BC

Model Name		PAC-AKA31BC	PAC-AKA51BC
Connectable No. of Indoor Units		3	5
Power Supply		Phase, Cycle, Voltage	
Power Input		W	3
Current		A	0.05
External Finish		Galvanized-Steel Sheets	
Dimensions		Width	In.
		Depth	In.
		Height	In.
Net Weight		Lbs.	19
Refrigerant Pipe Dimensions		Outdoor Unit to Branch Box	
		Gas (In.)	
		Liquid (In.)	
		Branch Box to Indoor Units	
Gas (In.)		A, B, C: 3/8	A, B, C, D: 3/8; E: 1/2
Liquid (In.)		A, B, C: 1/4	A, B, C, D, E: 1/4
Drainpipe Size (O.D.)		In.	3/4

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

# MULTI-ZONE | MSZ Indoor Units

(FOR MXZ-B OUTDOOR UNITS)



## Heat Pump

Model Name	Indoor Unit		MSZ-FE09NA-8	MSZ-FE12NA-8	MSZ-FE18NA	MSZ-GE06NA-8	MSZ-GE09NA-8	MSZ-GE12NA-8	MSZ-GE15NA-8	MSZ-GE18NA-8	MSZ-GE24NA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	18,000	6,000	9,000	12,000	14,000	17,200	22,500
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	13,600	21,600	7,200	10,900	14,400	18,000	21,600	27,600
Power Supply	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V *3								
Voltage	Indoor - Outdoor S1 - S2		AC 208 / 230V								
	Indoor - Outdoor S2 - S3		DC12-24V								
	MCA	A	1.0								
Fan	Blower Motor	F.L.A.	0.76								
	Airflow at Cooling (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful)*1	DRY (CFM)	162-226-339-381	162-226-381-410	388-469-628-738	145-170-237-321-399		145-170-237-321-399	205-272-335-420-533	230-275-339-420-533	388-469-628-738
		WET (CFM)	144-202-307-343	144-202-350-367	347-420-562-661	109-134-201-286-364		109-134-201-286-364	170-237-300-385-498	194-240-304-385-498	347-420-562-661
	Airflow at Heating (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful) *2	WET (CFM)	166-240-367-381	166-240-399-420	388-469-628-738	145-170-233-321-406	145-170-237-321-406	145-170-237-321-406	205-247-304-367-463	230-275-339-431-512	388-469-628-738
Sound Pressure Level at Cooling (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful) *1	dB(A)	22-31-39-42	22-33-43-45	34-41-49-53	19-22-30-37-43		19-22-30-37-45	26-32-38-44-49	28-33-38-44-49	34-41-49-53	
Sound Pressure Level at Heating (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful) *2	dB(A)	22-31-40-42	22-23-43-44	32-41-49-52	19-22-30-37-43		19-22-30-37-43	26-30-35-40-46	28-33-38-43-49	32-41-49-52	
External Finish Color	Munsell No. 1.0Y 9.2 / 0.2										
Dimension Unit	W: In.		31-3/8		43-5/16		31-7/16				43-5/16
	D: In.		10-1/8		9-3/8		9-1/8				9-3/8
	H: In.		11-5/8		12-13/16		11-5/8				12-13/16
Weight Unit	Lbs.		27		37		22				37
Field Drainpipe Size O.D.	In.		5/8								
Remote Controller	Type	Hand-held Wireless Remote Controller (Optional MHK1 Backlit Wireless Wall-mounted Remote Controller)									
Refrigerant	Type	R410A									
Refrigerant Pipe	Gas Side O.D.	In.	3/8		5/8		3/8		1/2		5/8
	Liquid Side O.D.	In.	1/4		8		1/4				3/8
Connection Method	Indoor/Outdoor	Flared/Flared									

NOTES: Test conditions are based on AHRI 210/240.

\*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

\*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

\*3. Indoor units receive power from outdoor units through field-supplied wiring.


Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

For data on specific indoor unit combinations, see page 17 - combination tag

# MULTI-ZONE | SEZ Indoor Unit

(FOR MXZ-B OUTDOOR UNITS)



## Heat Pump

Model Name	Indoor Unit		SEZ-KD09NA4	SEZ-KD12NA4	SEZ-KD15NA4	SEZ-KD18NA4
Cooling *1	Rated Capacity	Btu/h	8,100	11,500	14,100	17,200
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	13,600	18,000	21,600
Power Supply	Phase, Cycle, Voltage		1-Phase, 60Hz, 208 / 230V *4			
Voltage	Indoor - Outdoor S1-S2		AC 208-230V			
	Indoor - Outdoor S2-S3		DC12-24V			
	MCA	A	1.0			
Fan	Blower Motor Output	W	96			
	Airflow at Cooling/Heating (Lo-Med-Hi)	CFM	194-247-317	247-317-388	353-441-529	423-529-635
	External Static Pressure *3	In. W.G.	0.02-0.06-0.14-0.20			
Sound Pressure Levels (Lo-Med-Hi)		dB(A)	23-26-30	23-28-33	30-34-37	30-34-38
External Finish		Galvanized-steel Sheets				
Dimension	W: In.		31-1/8	39	46-7/8	
	D: In.		27-9/16			
	H: In.		7-7/8			
Weight	Lbs.		42	50	54	62
Drain-lift Mechanism (Included)	H: In.		21-11/16			
Field Drainpipe Size O.D.	In.		1-1/4			
Remote Controller	Type	Select from MHK1 (Preferred), PAR-21MA, or PAR-FL/FA32 Remote Controllers				
Refrigerant	Type	R410A				
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	
	Liquid Side O.D.		1/4			
Connection Method		Flared/Flared				
Connection Method		Flared/Flared				

**Notes:**

- \*1. Cooling-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).
- \*2. Heating-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).
- \*3. External static pressure is factory set to 0.06" W.G. Adjustable via the PAR-21MAA.
- \*4. Indoor units receive power from outdoor units through field supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

\*\*For data on specific indoor unit combinations, see pages 14-17 and 26-27.

- Reference page 31 for SEZ static performance curves.

# MFZ Floor-mounted Indoor Unit

(FOR MXZ-B OUTDOOR UNITS)



Model Name	Indoor Unit		MFZ-KA09NA	MFZ-KA12NA	MFZ-KA18NA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	18,000
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	14,400	21,600
Power Supply	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V *3		
Voltage	Indoor - Outdoor S1 - S2		AC 208 / 230V		
	Indoor - Outdoor S2 - S3		DC12-24V		
	MCA	A	1		
Fan	Airflow at Cooling/Heating (Lo-Med-Hi)	DRY (CFM)	169-205-251-314	177-215-261-321	251-279-325-394
		WET (CFM)	163-197-241-303	170-207-252-309	241-269-313-379
	Airflow at Heating (Lo-Med-Hi-Super Hi) *2	(CFM)	177-198-219-332	184-201-219-335	261-275-297-434
Sound Pressure Level at Cooling (Lo-Med-Hi-Super Hi) *1		dB(A)	25-30-35-40	26-31-36-41	35-38-42-46
Sound Pressure Level at Heating (Lo-Med-Hi-Super Hi) *2		dB(A)	25-30-35-40	28-31-36-41	35-38-42-47
External Finish Color			Munsell No. 1.0Y 9.2/0.2		
Dimension Unit	W: In.		27-9/16		
	D: In.		7-7/8		
	H: In.		23-5/8		
Weight Unit		Lbs.	32		
Field Drainpipe Size O.D.		In.	5/8		
Remote Controller	Type		Hand-held Wireless Remote Controller (Optional MHK1 Backlit Wireless Wall-mounted Remote Controller or PAR-21MA Wired Wall-mounted Remote Controller with MAC-397IF Control Adapter)		
Refrigerant	Type		R410A		
Refrigerant Pipe	Gas Side O.D.	In.	3/8	1/2	
	Liquid Side O.D.	In.	1/4		
Connection Method	Indoor/Outdoor		Flared/Flared		

**Notes**

\*1. Cooling-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

\*2. Heating-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).

\*3. Indoor units receive power from outdoor units through field supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

Presently, there is no 1:1 system with the MFZ indoor unit.

# SLZ Ceiling-recessed Indoor Unit

(FOR MXZ-B OUTDOOR UNITS)



Model Name	Indoor Unit		SLZ-KA09NA	SLZ-KA12NA	SLZ-KA15NA
Cooling *1	Rated Capacity	Btu/h	8,400	11,100	15,000
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	13,600	18,000
Power Supply	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V *3		
Voltage	Indoor - Outdoor S1 - S2		AC 208 / 230V		
	Indoor - Outdoor S2 - S3		DC12-24V		
	MCA	A	1		
Fan	Blower Motor	F.L.A.	0.23	0.28	0.28
	Airflow at Cooling/ Heating (Lo-Med-Hi)	DRY (CFM)	280-320-350	280-320-390	280-320-390
		WET (CFM)	250-290-320	250-290-350	250-290-350
Sound Pressure Level (Lo-Med-Hi) *2		dB(A)	29-32-38	30-34-39	31-35-40
External Finish Color		Unit/Grille	Galvanized-steel Sheets/Munsell 6.4Y 8.9 / 0.4		
Dimension Unit (Grille)	W: In.		22-7/16 (25-5/8)		
	D: In.		22-7/16 (25-5/8)		
	H: In.		9-1/4 (13/16)		
Weight Unit (Grille)		Lbs.	36 (7)		
Drain-lift Mechanism (Included)		H: In.	19-11/16		
Field Drainpipe Size O.D.		In.	1-1/4		
Remote Controller		Type	Select from MHK1 (Preferred), PAR-21MA, or PAR-FL/FA32 Remote Controllers		
Refrigerant	Type		R410		
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2
	Liquid Side O.D.	In.	1/4		
Connection Method	Indoor/Outdoor		Flared/Flared		
Connection Method	Indoor/Outdoor		Flared/Flared		

**Notes:**

\*1. Cooling-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

\*2. Heating-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).

\*3. Indoor units receive power from outdoor units through field supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



# ADDITIONAL M-SERIES INFORMATION

## M-SERIES OPERATING CONDITIONS

		INDOOR INTAKE AIR TEMPERATURE	OUTDOOR INTAKE AIR TEMPERATURE
COOLING	MAXIMUM	95° F D.B., 71° F W.B. (MU; SUZ; MXZ-2B20, 3B24, 3B30, 4B36-1) 90° F D.B., 73° F W.B. (MUZ/Y-GE; MUZ-FE; MUZ/Y-D)	115° F D.B. (MU; MUZ/Y-GE; MUZ/Y-D; MUZ-FE; SUZ; MXZ-2B20/3B24/3B30/4B36-1, 8B48)
	MINIMUM	67° F D.B., 57° F W.B. (MU; MUZ/Y-GE; MUZ/Y-D; MUZ-FE; SUZ; MXZ-2B20/3B24/3B30/4B36-1)	14° F D.B. (MUZ/Y-GE; MUZ/Y-D; MUZ-FE; SUZ; MXZ-2B20/3B24/3B30/4B36-1) 23° F D.B. (MXZ-8B48) 67° F D.B. (MU)
HEATING	MAXIMUM	80° F D.B., 67° F W.B. (MU; MUZ/Y-GE; MUZ/Y-D; MUZ-FE; SUZ; MXZ-2B20/3B24/3B30/4B36-1)	75° F D.B., 65° F W.B. (MUZ/Y-GE; MUZ/Y-D; MUZ-FE; SUZ; MXZ-2B20/3B24/3B30/4B36-1) 70° F D.B. (MXZ-8B48)
	MINIMUM	70° F D.B., 60° F W.B. (MUZ-GE; MUZ-D; MUZ-FE; SUZ; MXZ-2B20/3B24/3B30/4B36-1)	-13° F D.B., -15° F W.B. (MUZ-FE)-4° F D.B., -5° F W.B. (SUZ; MUZ-GE) 5° F D.B., 4° F W.B. (MXZ-8B48NA) 6° F D.B., 5° F W.B. (MXZ-2B20/3B24/3B30/4B36-1) 14° F D.B., 13° F W.B. (MUZ/Y-D)

\* MU units operate at intake air temperature down to 10° F with the addition of an ICM-326HM-1 low temperature control.

## REFRIGERANT LINESETS

LINESET MODEL NUMBER	TUBE SIZE (IN.)	LENGTH FT.	INSUL.	USE WITH MITSUBISHI ELECTRIC MODELS
MLS143812T-15	1/4 x 3/8	15	1/2"	MS-A09WA; MSZ-GE06NA-8; MSY/Z-GE09,12NA-8; MSZ-FE09,12NA-8; SEZ-KD09,12NA4; MFZ-KA09,12NA SLZ-KA09, 12NA
MLS143812T-30	1/4 x 3/8	30	1/2"	
MLS143812T-50	1/4 x 3/8	50	1/2"	
MLS143812T-65	1/4 x 3/8	65	1/2"	
MLS141212T-15	1/4 x 1/2	15	1/2"	MS-A12WA; MSY/Z-GE15,18NA-8; SEZ-KD15,18NA4; MFZ-KA18NA; SLZ-KA15NA
MLS141212T-30	1/4 x 1/2	30	1/2"	
MLS141212T-50	1/4 x 1/2	50	1/2"	
MLS141212T-65	1/4 x 1/2	65	1/2"	
MLS141212T-100	1/4 x 1/2	100	1/2"	
MPLS385812T-10	3/8 x 5/8	10	1/2"	MSY/Z-GE24NA; MSY/Z-D30,36NA-8; MXZ-8B48NA; MSZ-FE18NA
MPLS385812T-15	3/8 x 5/8	15	1/2"	
MPLS385812T-30	3/8 x 5/8	30	1/2"	
MPLS385812T-50	3/8 x 5/8	50	1/2"	
MPLS385812T-65	3/8 x 5/8	65	1/2"	
MPLS385812T-100	3/8 x 5/8	100	1/2"	

## REFRIGERANT LINE LENGTH FLARE/FLARE

INDOOR UNIT	OUTDOOR UNIT	LENGTH IN FEET	HEIGHT IN FEET
MS-A09WA	MU-A09WA	65	35
MS-A12WA	MU-A12WA	65	35
MSY-GE09NA-8	MUY-GE09NA	65	40
MSY-GE12NA-8	MUY-GE12NA	65	40
MSY-GE15NA-8	MUY-GE15NA-1	65	40
MSY-GE18NA-8	MUY-GE18NA-1	100	50
MSZ-GE09NA-8	MUZ-GE09NA	65	40
MSZ-GE12NA-8	MUZ-GE12NA	65	40
MSZ-GE15NA-8	MUZ-GE15NA-1	65	40
MSZ-GE18NA-8	MUZ-GE18NA-1	100	50
MSY-GE24NA	MUY-GE24NA	100	50
MSZ-GE24NA	MUZ-GE24NA	100	50
MSY-D30NA-8	MUY-D30NA-1	100	50
MSZ-D30NA-8	MUZ-D30NA-1	100	50
MSY-D36NA-8	MUY-D36NA-1	100	50
MSZ-D36NA-8	MUZ-D36NA-1	100	50
MSZ-FE09NA-8	MUZ-FE09NA-1	65	40
MSZ-FE12NA-8	MUZ-FE12NA1	65	40
MSZ-FE18NA	MUZ-FE18NA	100	50
SEZ-KD09NA4	SUZ-KA09NA	65	40
SEZ-KD12NA4	SUZ-KA12NA	65	40
SEZ-KD15NA4	SUZ-KA15NA	65	40
SEZ-KD18NA4	SUZ-KA18NA	100	50
SLZ-KA09NA	SUZ-KA09NA	65	40
SLZ-KA12NA	SUZ-KA12NA	65	40
SLZ-KA15NA	SUZ-KA15NA	65	40
MSZ-GE/FE; MFZ; SEZ; SLZ	MXZ-2B20NA-1	164	49*/33
MSZ-GE/FE; MFZ; SEZ; SLZ	MXZ-3B24NA-1	230	49*/33
MSZ-GE/FE; MFZ; SEZ; SLZ	MXZ-3B30NA-1	230	49*/33
MSZ-GE/FE; MFZ; SEZ; SLZ	MXZ-4B36NA-1	230	49*/33
MSZ-GE/FE; MFZ; SEZ; SLZ	MXZ-8B48NA	377	66*/98

\*49' and 66' applies to installations where the outdoor unit is installed below the indoor unit.

## PORT ADAPTER GUIDE

AVAILABLE INDOOR UNITS	LINE SET SIZE
MSZ Wall-mounted	
MSZ-GE06NA-8	3/8" gas x 1/4" liquid
MSZ-GE09NA-8	3/8" gas x 1/4" liquid
MSZ-FE09NA-8	3/8" gas x 1/4" liquid
MSZ-GE12NA-8	3/8" gas x 1/4" liquid
MSZ-FE12NA-8	3/8" gas x 1/4" liquid
MSZ-GE15NA-8	1/2" gas x 1/4" liquid
MSZ-FE18NA	5/8" gas x 3/8" liquid
MSZ-GE18NA-8	1/2" gas x 1/4" liquid
MSZ-GE24NA	5/8" gas x 3/8" liquid
MFZ Floor-standing	
MFZ-KA09NA	3/8" gas x 1/4" liquid
MFZ-KA12NA	3/8" gas x 1/4" liquid
MFZ-KA18NA	1/2" gas x 1/4" liquid
PLA Ceiling-recessed	
PLA-A12BA4	1/2" gas x 1/4" liquid
PLA-A18BA4	1/2" gas x 1/4" liquid
PLA-A24BA4	5/8" gas x 3/8" liquid
PCA Ceiling-suspended	
PCA-A24KA4	5/8" gas x 3/8" liquid
SLZ Ceiling-recessed	
SLZ-KA09NA	3/8" gas x 1/4" liquid
SLZ-KA12NA	3/8" gas x 1/4" liquid
SLZ-KA15NA	1/2" gas x 1/4" liquid
SEZ/PEAD Horizontal-ducted	
SEZ-KD09NA4	3/8" gas x 1/4" liquid
SEZ-KD12NA4	3/8" gas x 1/4" liquid
SEZ-KD15NA4	1/2" gas x 1/4" liquid
SEZ-KD18NA4	1/2" gas x 1/4" liquid
PEAD-A24AA4	5/8" gas x 3/8" liquid

## PORT ADAPTERS PART NUMBERS

MAC-A454JP-E	3/8" x 1/2"
MAC-A455JP-E	1/2" x 3/8"
MAC-A456JP-E	1/2" x 5/8"
PAC-SG76RJ-E	3/8" x 5/8"
PAC-493PI	1/4" x 3/8"

**M-Series systems are not recommended for critical room and low ambient cooling applications. Use commercial grade P-Series with full cooling capacity down to 0° F with wind baffle.**

MXZ-2B20NA-1
Port A = 3/8" gas x 1/4" liquid
Port B = 3/8" gas x 1/4" liquid

MXZ-3B24NA-1
Port A = 1/2" gas x 1/4" liquid
Port B = 3/8" gas x 1/4" liquid
Port C = 3/8" gas x 1/4" liquid

MXZ-3B30NA-1
Port A = 1/2" gas x 1/4" liquid
Port B = 3/8" gas x 1/4" liquid
Port C = 3/8" gas x 1/4" liquid


MXZ-4B36NA-1
Port A = 1/2" gas x 1/4" liquid
Port B = 3/8" gas x 1/4" liquid
Port C = 3/8" gas x 1/4" liquid
Port D = 3/8" gas x 1/4" liquid

MXZ-8B48NA	
Branch Box	Branch Box
PAC-AKA31BC	PAC-AKA51BC
PORT A = 3/8" gas x 1/4" liquid	PORT A = 3/8" gas x 1/4" liquid
PORT B = 3/8" gas x 1/4" liquid	PORT B = 3/8" gas x 1/4" liquid
PORT C = 3/8" gas x 1/4" liquid	PORT C = 3/8" gas x 1/4" liquid
	PORT D = 3/8" gas x 1/4" liquid
	PORT E = 1/2" gas x 1/4" liquid

## Notes for application:

- \* Check the lineset sizes for your indoor selected models.
- \* Select the branch box or boxes needed for your application.
- \* Compare indoor unit lineset sizes to branch box or outdoor unit port sizes.
- \* Connect 15K + indoor units to the larger 1/2" port on the PAC-AKA51BC branch box or outdoor unit.
- \* Adapt lineset size with appropriate port adapter from above list.
- \* When using the PLA-A24BA4, PEAD-A24AA4, PCA-A24KA4 MSZ-FE18NA or MSZ-GE24NA two port adapters will be needed  
1-MAC-A456JP-E (1/2" x 5/8") or 1-PAC-SG76RJ-E (3/8" x 5/8") and 1-PAC493PI (1/4" x 3/8").

## How to Read a Model Number

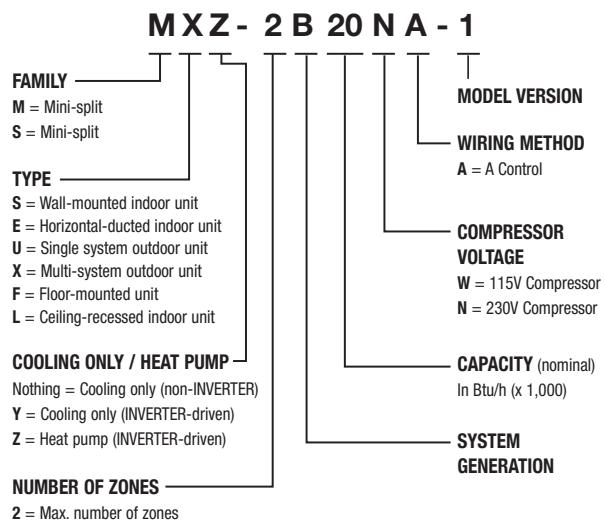

## COOLING CAPACITY CORRECTION FACTORS

MODEL	REFRIGERANT PIPING LENGTH (ONE WAY)		
	25 FT (STD)	40 FT	65 FT
MU-A09WA MU-A12WA MUZ-GE09NA MUY-GE09NA MUZ-GE12NA MUY-GE12NA MUZ-GE15NA-1 MUY-GE15NA-1 MUZ-FE09NA-1 MUZ-FE12NA1 SUZ-KA09NA SUZ-KA12NA SUZ-KA15NA	Capacity x 1.0	Capacity x 0.954	Capacity x 0.878

MODEL	REFRIGERANT PIPING LENGTH (ONE WAY)			
	25 FT (STD)	40 FT	65 FT	100 FT
MUZ-GE18NA-1 MUY-GE18NA-1  MUZ-D30NA-1 MUZ-D36NA-1 MUY-D30NA-1 MUY-D36NA-1 SUZ-KA18NA	Capacity x 1.0	Capacity x 0.954	Capacity x 0.878	Capacity x 0.713
MUZ-GE24NA MUY-GE24NA MUZ-FE18NA	Capacity x 1.0	Capacity x 0.954	Capacity x 0.878	Capacity x 0.771

## M-SERIES SIZING

It is very important that all contractors follow proper procedure and size units based on a Manual J calculation. A load calculation takes into account all the factors that cause the building to lose heat in the winter and gain heat in the summer. Some of the factors taken into consideration are exposed walls, insulation, windows, doors, and even the direction the building faces.

Inverter technology has changed the way heat pumps are used. Because the inverter can vary the capacity of the system, we can now size units based on the largest load, which in many cases may be the heat load. When single speed compressors are sized on heat load and changed over to cooling, the units can be grossly over-sized. The result is very little dehumidification and comfort problems.

Using charts like the ones below from the technical service manual, you can check the equipment capacity at the design temperatures for heating and cooling. If these values fall within both the heating and cooling capacity ranges of the system, you can select that system with confidence.

### MSZ/MUZ-FE09NA

#### HEATING CAPACITY

Outdoor Temperature Degrees (°F)	-13.0	-4.0	5.0	14.0	23.0	32.0	41.0	50.0
Heating Capacity (Btu/h)	6,740	8,978	1,1216	13,453	15,090	16,469	17,848	21,338
Ratio	0.62	0.82	1.03	1.23	1.38	1.51	1.64	1.96
Percent Heating Capacity	62%	82%	100%	100%	100%	100%	100%	100%

#### COOLING CAPACITY

Indoor Air IWB (°F)	Outdoor intake air DB temperature (°F)											
	85			95			105			115		
	TC	SHC	TPC	TC	SHC	TPC	TC	SHC	TPC	TC	SHC	TPC
71	10.3	6.5	0.63	9.7	6.1	0.68	9.0	5.6	0.72	8.3	5.2	0.75
67	9.7	7.4	0.60	9.0	6.8	0.65	8.4	6.4	0.69	7.7	5.8	0.72
63	9.1	8.1	0.58	8.5	7.6	0.62	7.7	6.9	0.66	7.0	6.3	0.69

Notes: IWB: Intake air wet-bulb temperature  
TC: Total capacity  
SHC: Sensible heat capacity  
TPC: Total power consumption (kW)

## M-SERIES AIR OUTLET COVERAGE RANGE\*

MODEL NUMBER	MODE	FUNCTION	AIRFLOW (CFM)	COVERAGE (FT)
MS-A09WA	FAN	DRY	335	25.4
	COOL	WET	300	22.8
MS-A12WA	FAN	DRY	406	30.6
	COOL	WET	363	27.5
MSZ-GE06NA-8	HEAT	DRY	406	29.5
MSY-GE09NA-8 MSZ-GE09NA-8 MSY-GE12NA-8 MSZ-GE12NA-8	COOL	WET	286	21.0
MSY-GE15NA-8	HEAT	DRY	463	33.5
MSZ-GE15NA-8	COOL	WET	385	28.0
MSY-GE18NA-8 MSZ-GE18NA-8	HEAT	DRY	512	36.9
MSY-GE18NA-8 MSZ-GE18NA-8	COOL	WET	385	28.0
MSY-GE24NA MSZ-GE24NA	HEAT	DRY	738	36.9
MSY-GE24NA MSZ-GE24NA	COOL	WET	661	33.2
MSZ-FE09NA-8	HEAT	DRY	381	27.7
	COOL	WET	307	22.4
MSZ-FE12NA-8	HEAT	DRY	420	30.4
	COOL	WET	350	25.4
MSZ-FE18NA	HEAT	DRY	738	36.9
	COOL	WET	661	33.2
MSY-D30NA-8 MSZ-D30NA-8 MSY-D36NA-8 MSZ-D36NA-8	HEAT	DRY	848	45.0
	COOL	WET	763	40.7
MFZ-KA09NA	HEAT	DRY	332	15.4
	COOL	WET	303	14.2
MFZ-KA12NA	HEAT	DRY	335	15.6
	COOL	WET	309	14.5
MFZ-KA18NA	HEAT	DRY	434	20.0
	COOL	WET	379	17.5
SLZ-KA09NA	HEAT	DRY	350	12.1
	COOL	WET	320	11.1
SLZ-KA12NA	HEAT	DRY	390	13.5
	COOL	WET	350	12.1
SLZ-KA15NA	HEAT	DRY	390	13.5
	COOL	WET	350	12.1

\*Air coverage represents the distance with one ft/sec air speed when blowing out horizontally from the unit operating at the High fan speed. This is only a general guideline; actual coverage depends on size and layout of the room.



Mitsubishi Electric Cooling & Heating  
1340 Satellite Boulevard, Suwanee, GA 30024  
Phone: 888-467-7546 Fax: 800-658-1458



Mitsubishi Electric, H2i and the three diamond logo are registered trademarks of Mitsubishi Electric Corporation.

\*Hyper-heating technology is a pending patent of Mitsubishi Electric Corporation.

RedLINK and RedLINK wireless technology logos are registered trademarks of Honeywell International.

See complete warranty for terms, conditions and limitations.

A copy is available from Mitsubishi Electric.

**MSCG\_6.13 (Revised) 50K OA**

For more information visit [www.mehvac.com](http://www.mehvac.com) | Printed In The U.S.A

